

ATHALON FILTERS
PALL



 HYDRAULIC
COMPONENTS
& FLUID CONTAMINATION
CONTROL



Pall Corporation

www.pall.com

Athalon™ Filters

For hydraulic and lubrication oils
Beta_{x(c)} 2000 Rated Stress Resistant filter
Technology (SRT)



Filtration. Separation. Solution.SM

Keeping Fluids the Cleanest, Longest, for the Greatest value

The Ultimate in Filter Performance

Pall's Athalon™ hydraulic and lube oil filters combine Betax(c) 2000 rated, stress-resistant filter technology and a full range of housings to provide the greatest overall filter performance and value available in industry today.

Laid Over Pleat (LOP) Filter Media Geometry

- ▶ Asset / Process review and priority setting
- ▶ Define current conditions and objectives
- ▶ Audit and provide recommendations
- ▶ Implement and train plant personnel
- ▶ Monitor and quantify system performance
- ▶ Review established goals and adapt as required

Stress-Resistant Filter Medium

- ▶ Improves fluid cleanliness consistency
- ▶ Improves performance in 'real world' conditions

Anti-Static Construction

- ▶ Minimizes static charge generation
- ▶ Prevents damage to filter element, housing, or fluid due to static discharge


Coreless/Cageless Construction

- ▶ 60% lighter than comparable filter elements with cores
- ▶ Reduces disposal costs (filter elements are incinerable, shreddable or crushable)

Simple to Install and Inexpensive to Maintain

- ▶ Common port and mounting interfaces and cover servicing makes maintenance quick and easy to perform with the minimum of basic tools

Consistent Filtration Performance Throughout a Long Service Life*

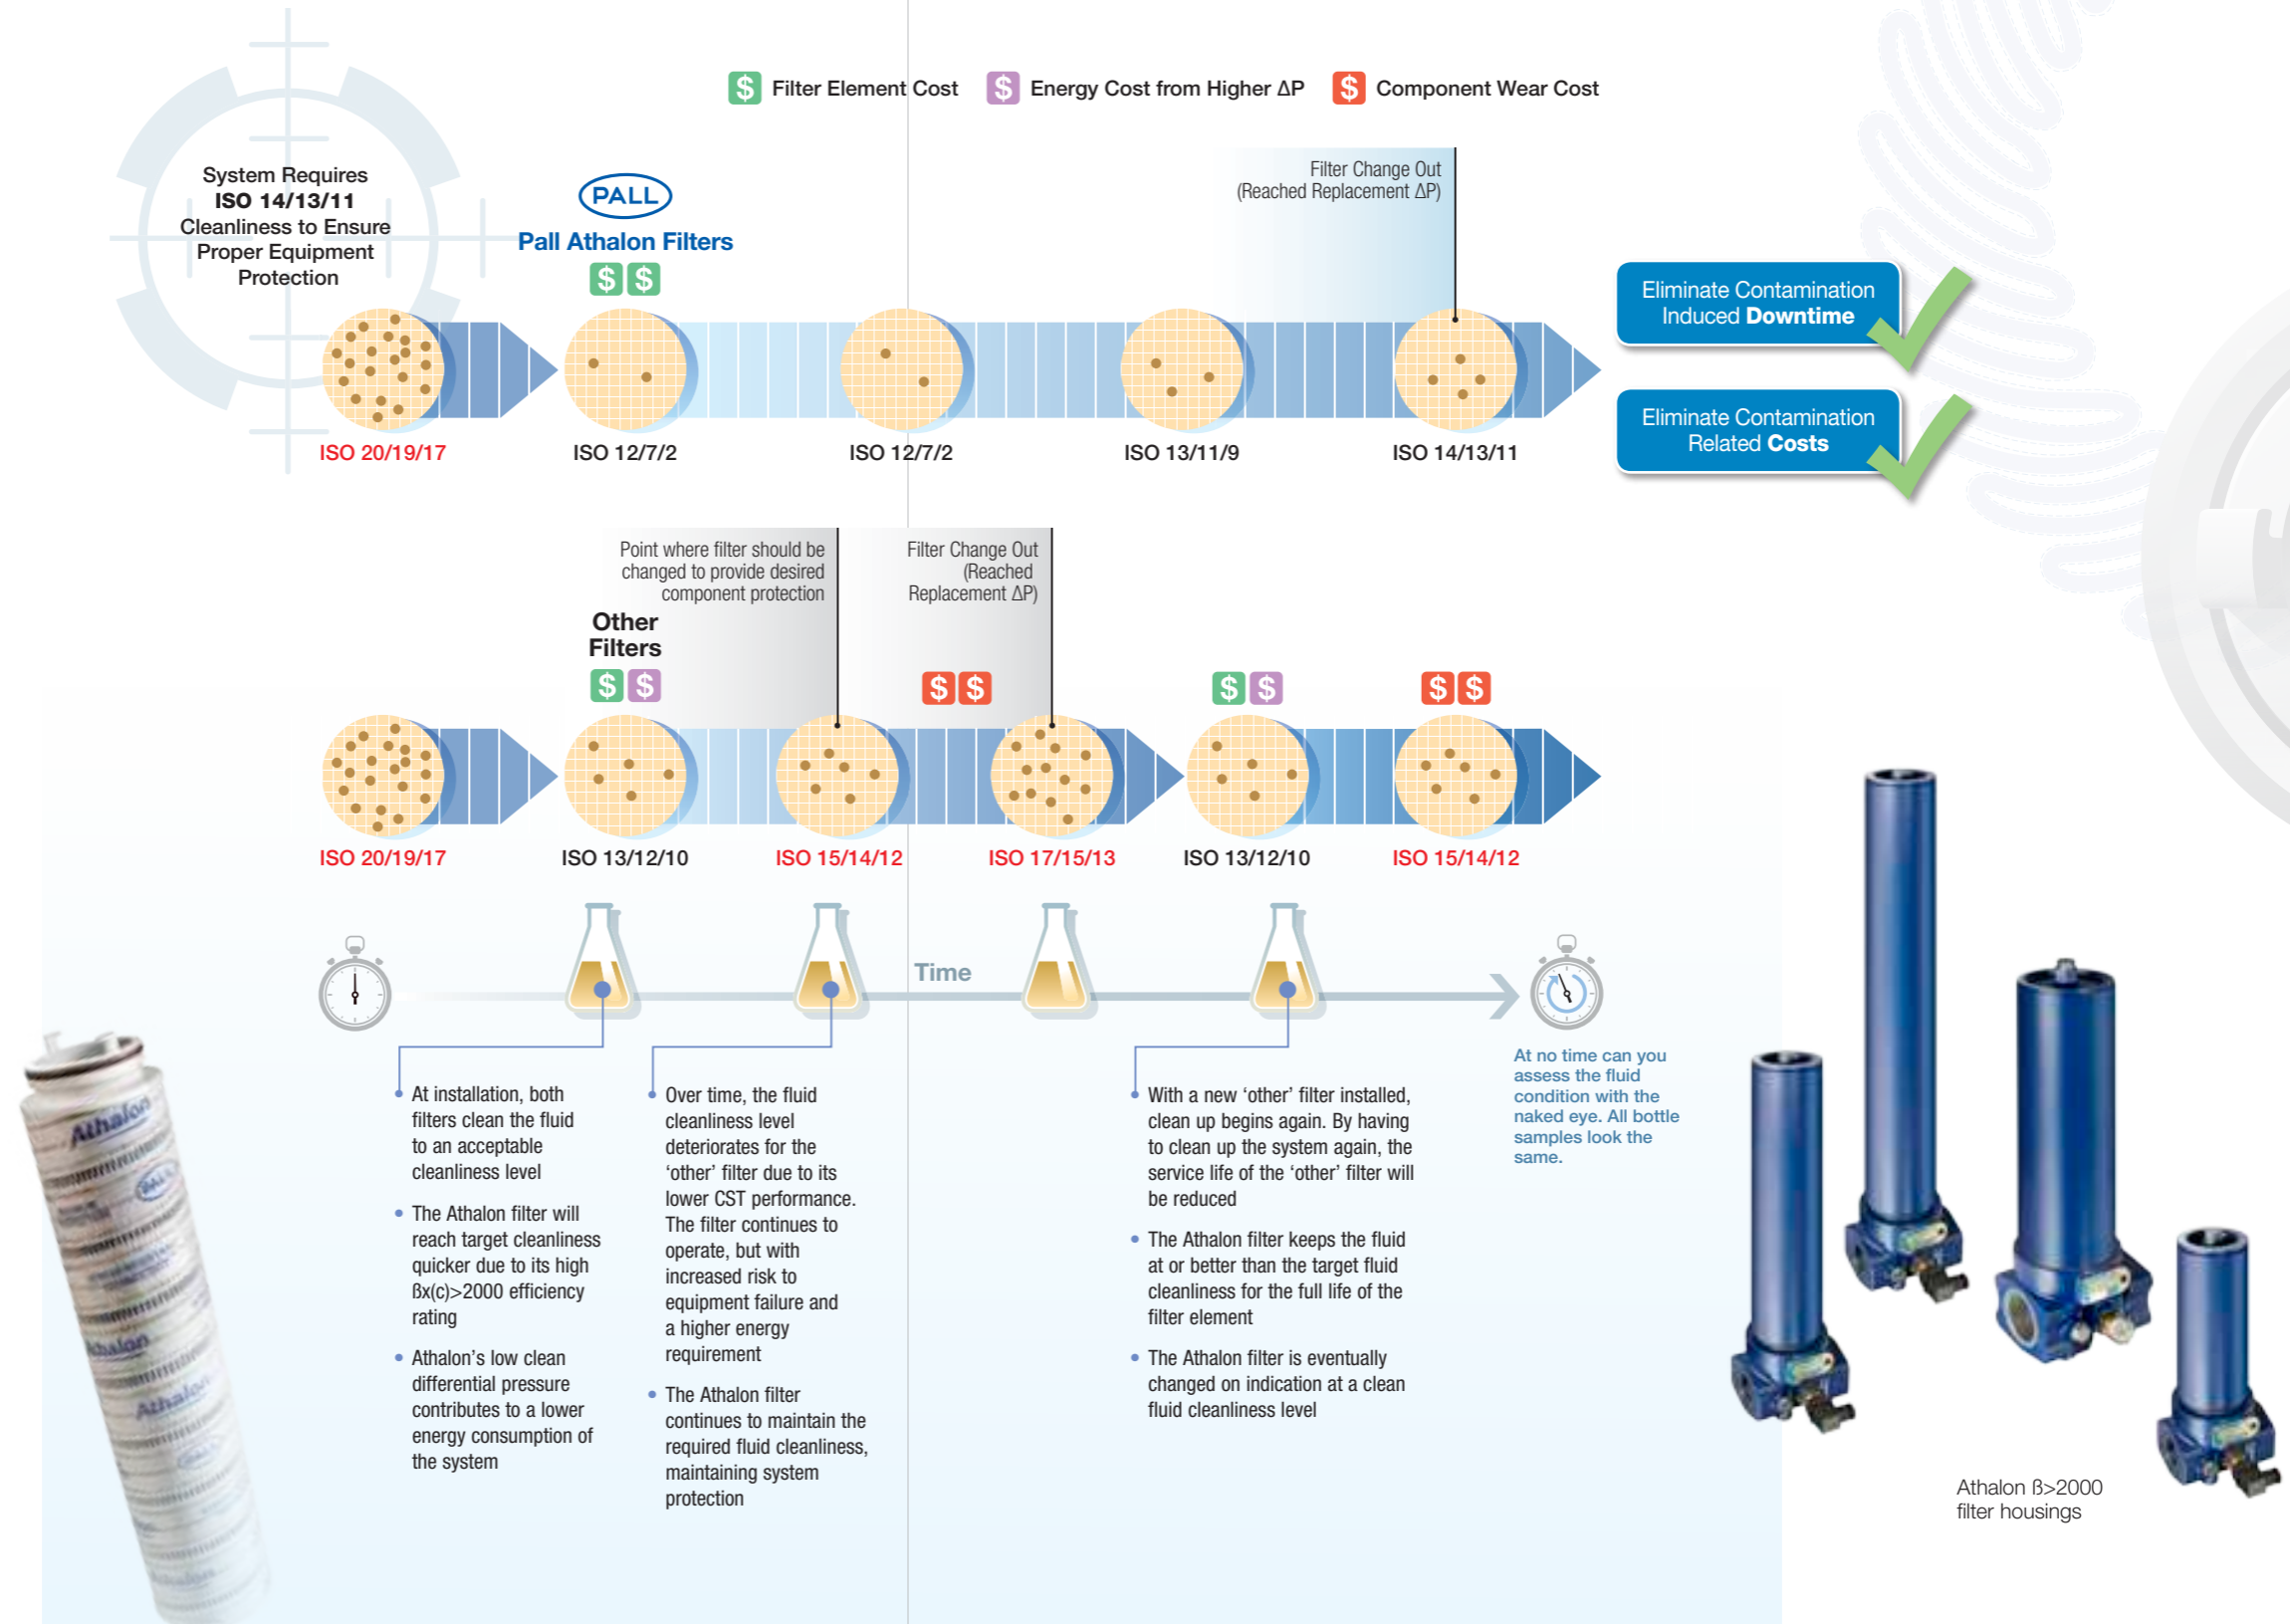

Athalon™

Athalon Filter Elements

Beta_{X(C)} 2000 Rated Stress-Resistant Filters

Over the years, Pall's continuous media development program has, made many advances in the state-of-the-art in fluid clarification.


Athalon filters represent another industry first for lube and hydraulic filters with an unequalled Beta>2000 removal efficiency rating. This enhanced performance ensures equipment protection and extends component and fluid life.

'Setting new standards in filter element design'

Beta 2000 rated Stress Resistant media Technology in a Laid-Over Pleat configuration:


Inert, inorganic fibers securely bonded in a fixed, tapered pore structure with increased resistance to system stresses such as cyclic flow and dirt loading.

Benefit: Fast system fluid clean-up for increased equipment protection, improved performance over the service life of the filter element and more consistent fluid cleanliness.

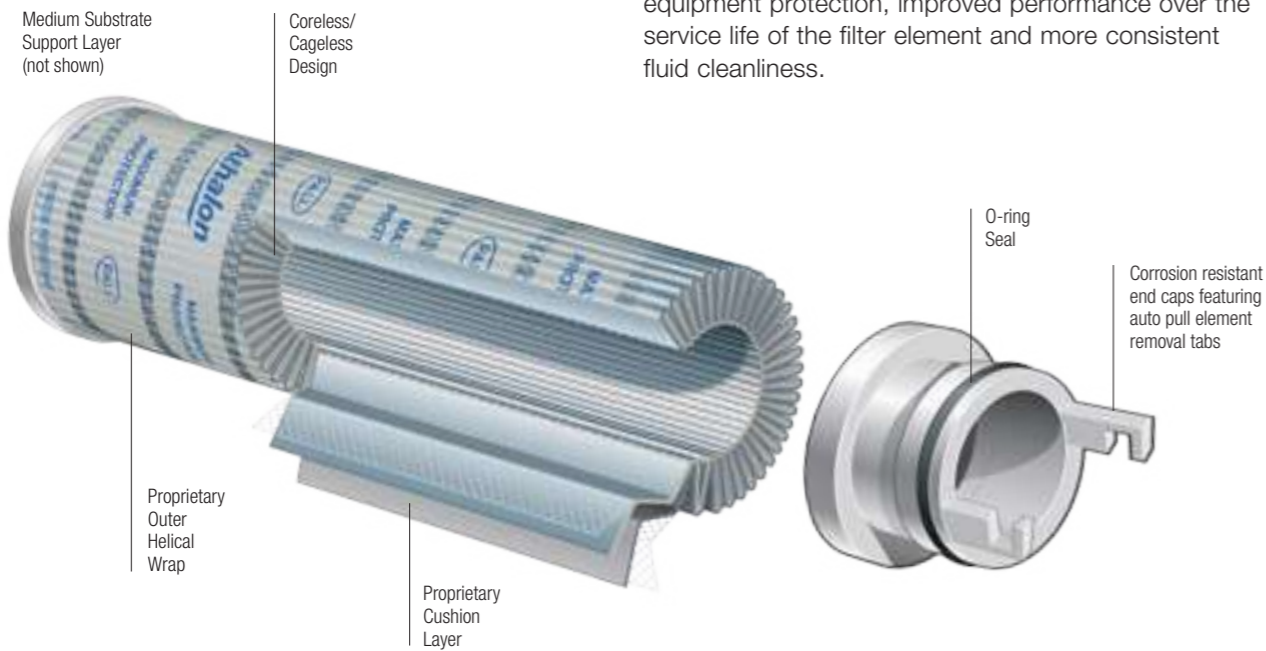

Athalon™

Why Beta_{X(C)} 2000?

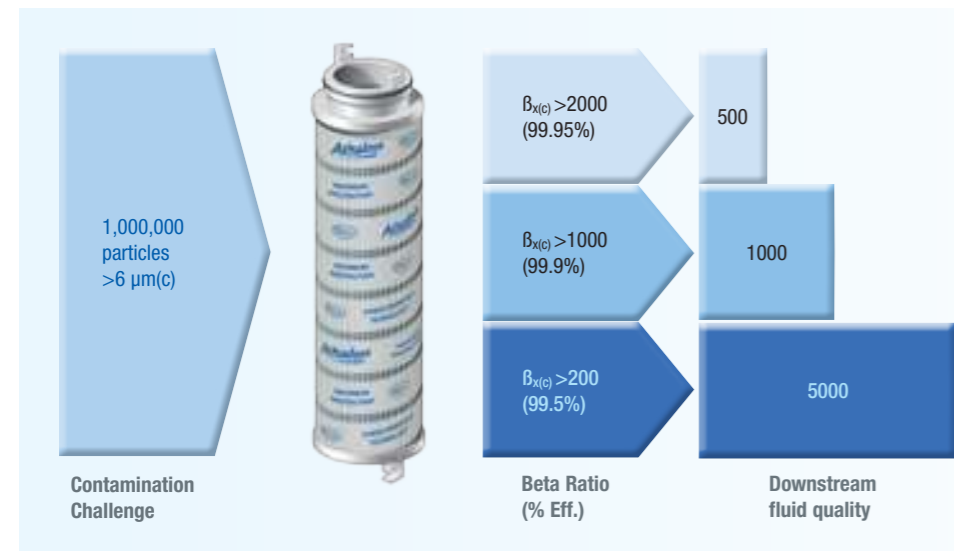

Athalon Filters

- 10x better efficiency compared to the common performance standard filter with β_{X(C)} >200
- Significantly fewer passes required to reach target cleanliness level
- Reduces equipment maintenance and unscheduled downtime costs

The Athalon Design Advantage



Laid-over Pleating

- ▶ Allows more filtration area to be packed into a given filter element envelope
- ▶ Creates uniform flow distribution through the filter element
- ▶ Protects against pleat collapse and bunching

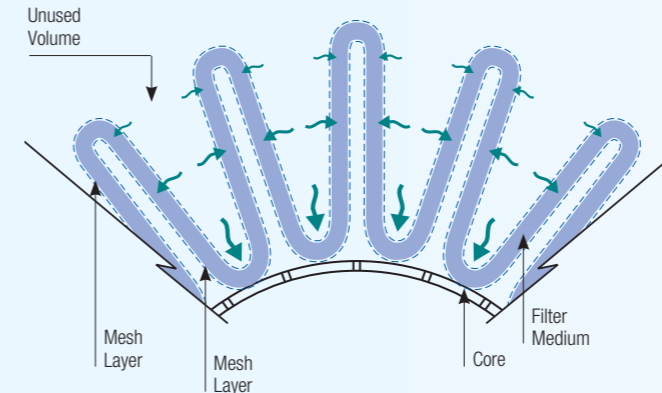


Figure 1. Conventional pleated filter element construction, showing Non-uniform flow distribution in a traditional fan-pleat filter.

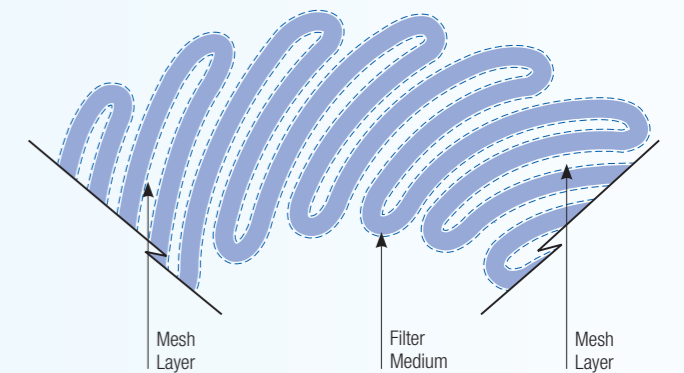


Figure 2. Ultipleat filter element construction, showing uniform flow distribution.

Beta 2000 Stress-Resistant Technology

- ▶ Maximum control of damaging particles
- ▶ Consistent, superior performance over the full service life of the filter
- ▶ The ultimate protection against contaminant induced costs


Beta β>2000: Giving the customers what they pay for

A critical measure of a filter's performance is its ability to sustain fluid cleanliness throughout its service life.

This graph compares a Athalon 7μm(c) rated filter to an competitors' products with equivalent ratings.


While all filters provide good fluid cleanliness early in service life, only Athalon filters produce sustained fluid cleanliness over the life of the filter.

Comparative Performance

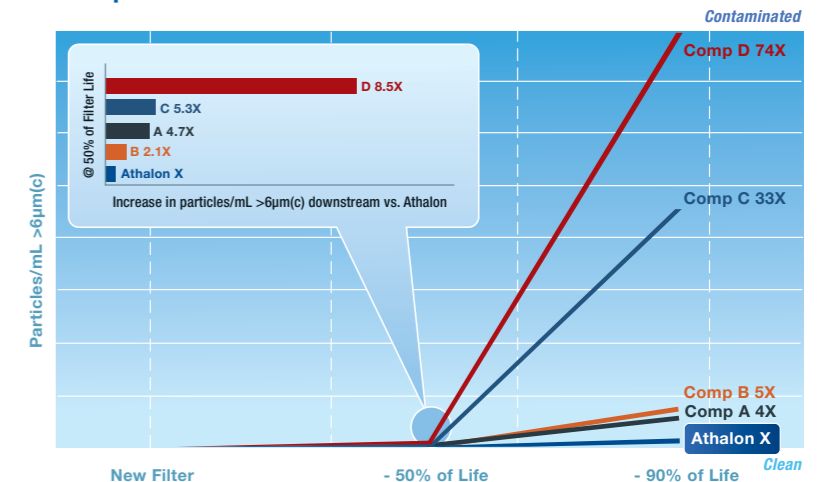

The Athalon Series of Housings

- ▶ High pressure, return line , and in-tank filter designs
- ▶ Pipe, flange, and manifold connection options
- ▶ Simplex and duplex configurations
- ▶ Pressures to 420 bar (6100 psi)
- ▶ Flows up to 1500 l/min (400 USgpm)

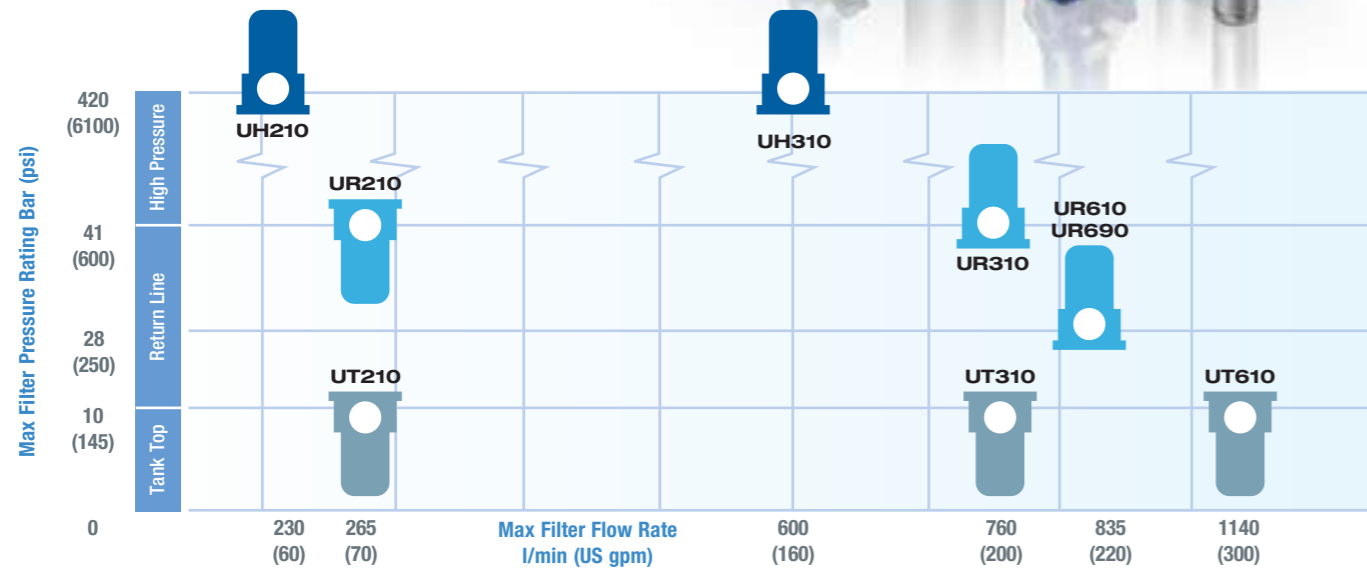

Athalon Auto-Pull mechanism

- When the filter cover is unscrewed, tabs on the filter element endcaps lock into hooks in the cover
- As the cover is removed, the filter element is automatically pulled from the tube, eliminating the need to handle or forcefully pull the element from the housing



Cover Service for safer handling

- Cover service makes filter element change simple, quick and safer for operators
- The filter element is withdrawn as the cover is unscrewed. The filter element does not need to be handled



Predictable Element servicing

- Athalon filters can be fitted with Pall's Deltadyne™ electrical or mechanical differential pressure indicators, or on tank-top mounted filters, a visual pressure gauge.
- Activation gives early warning of the need for filter change

Athalon Element Specifications

Element Collapse/Burst Rating (ISO 2941)

10 bard (150 psid)

Flow vs. Pressure Drop (ISO 3968)

See appropriate Ultipleat SRT housing literature.

Fluid Compatibility (ISO 2943)

Compatible with petroleum oils, water glycols, water-oil emulsions, and high water containing fluids. Fluorocarbon seals are available for industrial phosphate esters, diesters, and specified synthetics.

Flow Fatigue (ISO 3724)

Contact factory; filter element pleats are fully supported, both upstream and downstream to achieve excellent fatigue cycle life.

Fabrication Integrity (ISO 2942)

Fabrication integrity is validated and assured during the manufacturing process by numerous evaluations and inspections including Bubble Point testing.

Temperature Range


Fluorocarbon seals: -29°C (-20°F) to +120°C (+250°F)

Note: Maximum 60°C (140°F) in water based fluids. Other seal materials available on application

Quality Control

All filter elements are manufactured by Pall to exacting procedures and strict quality controls. Filter elements are checked against rigorous ongoing validation test protocols within Pall Corporation. Pall is accredited to ISO 9001 and QS 9000.

Multi-pass filter ratings (per ISO 16889)

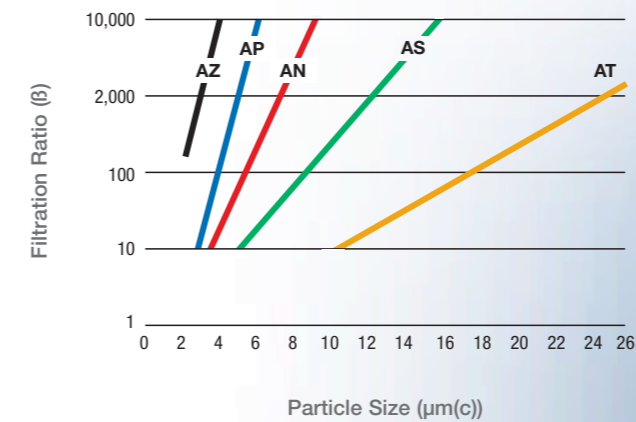

Cleanliness Code Ratings

Code	$\beta_{x(c)} \geq 1000$ per ISO 16889	CST Rating*
AZ	3	08/04/01
AP	5	12/07/02
AN	7	15/11/04
AS	12	16/13/04
AT	25	17/15/08

* CST: Cyclic Stabilization Test to determine filter rating under stress conditions, based on SAE ARP4205

Note these ISO codes are laboratory measurements under standard conditions. Cleanliness measured in actual operation will depend on operating conditions and sampling method.





Pall Corporation

25 Harbor Park Drive
Port Washington, NY 11050
+1 516 484 3600 telephone
+1 800 289 7255 toll free US

Portsmouth – UK
+44 (0)23 9233 8000 telephone
+44 (0)23 9233 8811 fax
industrialeu@pall.com

Filtration. Separation. Solution.SM



Better Lives. Better Planet.SM To see how Pall is helping enable a greener, safer and more sustainable future, visit www.pall.com/green.

Visit us on the web at www.pall.com

Pall Corporation has offices and plants throughout the world. For Pall representatives in your area, please go to www.pall.com/contact

Because of technological developments related to the products, systems, and/or services described herein, the data and procedures are subject to change without notice. Please consult your Pall representative or visit www.pall.com to verify that this information remains valid.

© Copyright 2015, Pall Corporation. Pall, , and Athalon are trademarks of Pall Corporation. ® indicates a trademark registered in the USA. **BETTER LIVES. BETTER PLANET.** and **Filtration. Separation. Solution.SM** are service marks of Pall Corporation.

M&EATHEN

December 2015

LubeTeam Hydraulic S.r.l.

Administration and Headquarter:

Via Tufara Scautieri, 6

83018 - San Martino Valle Caudina (AV)

Office and Warehouse:

S.S. 7 Appia, Km. 237,00

82011 - Airola BN

ITALY

Tel. +39 0823 950 994

Fax +39 0823 412 546

www.lubeteam.it info@lubeteam.it

Italian VAT / C.F. e P.IVA: 01251720627

Follow us



This document is the property of LubeTeam Hydraulic S.r.l. All data reported here are for the exclusive use of the Receiver. Reproduction is not authorized without writing permission, in all or in part of the content of this document, in accordance to Law 633 art. 171, dated April 22, 1941.

Il presente documento è di proprietà della LubeTeam Hydraulic S.r.l. I dati riportati sono per esclusivo del destinatario. La riproduzione, di tutto o in parte, non è autorizzata senza permesso scritto secondo l'art. 171 della L. 633 del 22 Aprile 1941.