

SUPRADISC VRFII
PALL CORPORATION



 HYDRAULIC
COMPONENTS
& FLUID CONTAMINATION
CONTROL

The Pall® VRFII varnish removal trolley is a portable off-line filter unit designed to reduce or eliminate the presence of varnish in hydraulic and lubrication systems.

Varnish is the thin, insoluble film deposit that forms on oil-wetted surfaces inside a hydraulic or lube system, such as bearings and servo valves.

When varnish forms, the effects can be devastating to the operation and availability of the equipment, and may include:

- Sluggish controls and servo valve stiction
- Costly downtime from unscheduled outages
- Start-up delays from unresponsive control systems

The demand for reliability, availability, and seamless operation of today's fluid systems requires an efficient, easy, and reliable method for removing varnish not only from the oil, but also from the wetted metal surfaces inside the machine.

Varnish Removal

Varnish in hydraulic or lubrication fluids can be effectively removed or reduced to acceptable levels by passing the fluid through the on-board SUPRADisc II filter module.

SUPRADisc II filter modules feature an innovative design incorporating a double separator concept, whereby the filter medium and separators are stacked on a central core and compressed to produce a stable high strength unit

Each sheet of filtration medium is individually sealed and separated resulting in close to 100 % effective filtration area that is dimensionally stable during shipment and handling, filtration and maintenance.



SUPRADisc filter module

In addition to removing varnish, the SUPRADisc filter module can:

- Improve fluid filterability properties
- Remove gel & colloids
- Remove free water (in small quantity)
- Retain fine contaminants at high loading rate.

SUPRADisc™ VRFII Varnish Removal Filter Trolley Fluid Conditioning Unit



Pall VRFII Filter trolley

Notes and Specifications

Operating Pressure Limits

Inlet: -0.5 barg (-7.3 psig) to 0.7 barg (10.1 psig)

System back pressure: 2 barg (29 psig) max.

Fluid Compatibility: Mineral and synthetic oils

Temperature range: 15° C (59° F) min to 40° C (104° F) max if no water cooler fitted, 70° C (158° F) Max if water cooler fitted

Approx. Dry Mass: 100-130kg (220-286 lbs)

Fluid connections: 1" BSP male

Water Inlet /outlet: ¾" BSP

Materials of Construction:

Vessel: Stainless Steel (316L)

Frame: Carbon Steel, painted

Hydraulic fittings: Carbon steel, painted

Seals: Fluorocarbon

Ordering Information

Filter Housing P/N: **VRF 1 2 3 4 CP 5 6 7**

(Filter housing supplied empty. Filter modules must be ordered separately)

Replacement filter module P/N: **200ME 8 C232VP**

Code	Number of modules
1	1
2	2

Code	Flowrate
4	15 L/min (4 US gpm)
8	30 L/min (8 US gpm)

Code	Voltage & Frequency
M5	220 V – 50 Hz, single phase
R3	380 V – 50 Hz, 3 phases
S3	400 V – 50 Hz, 3 phases

Code	Water Cooler options
N	No cooler
W	Standard cooler Fluid Temp 60°C (140°F) max
H	High capacity cooler Fluid Temp 70°C (158°F) max

Code	Motor
S	Without variable speed drive
V	With variable speed drive

Code	Language (IOM)
EN	English
FR	French
IT	Italian
DE	German
ES	Spanish


Code	Optional Kits
A	No optional Kit
B	5 m inlet/outlet hoses
C	Auto air bleed + option A
D	Auto air bleed + option B

Code	Media ¹
30	300
70	700
90	900

¹Other media available on request

Technical Specifications

Example: Typical mobile unit without water cooler and air bleed

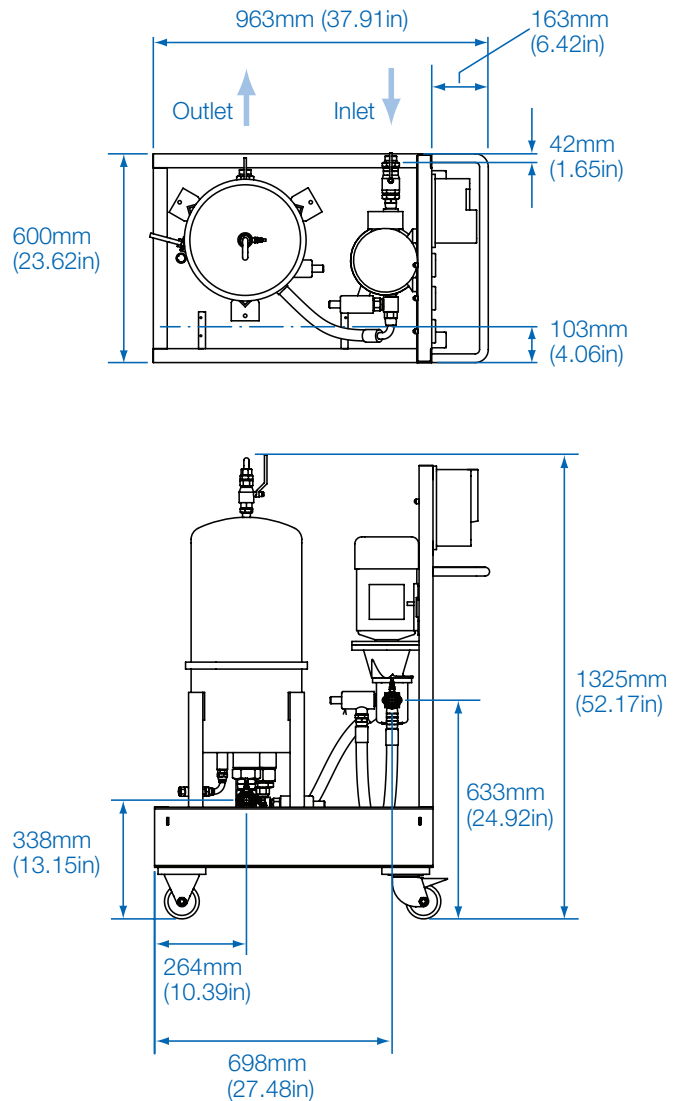

Pall Machinery and Equipment

25 Harbor Park Drive
Port Washington, NY 11050
+1 516 484 3600 telephone
+1 800 289 7255 toll free US

Portsmouth - UK
+44 (0)23 9233 8000 telephone
+44 (0)23 9233 8811 fax
industrialeu@pall.com

Filtration. Separation. Solution.SM



Visit us on the Web at www.pall.com

Pall Corporation has offices and plants throughout the world. For Pall representatives in your area, please go to www.pall.com/contact

Because of technological developments related to the products, systems, and/or services described herein, the data and procedures are subject to change without notice. Please consult your Pall representative or visit www.pall.com to verify that this information remains valid.

© Copyright 2013, Pall Corporation. Pall, SUPRADisc and are trademarks of Pall Corporation. ® indicates a trademark registered in the USA. BETTER LIVES. BETTER PLANET and Filtration. Separation. Solution.SM are service marks of Pall Corporation.

LubeTeam Hydraulic S.r.l.

Administration and Headquarter:

Via Tufara Scautieri, 6

83018 - San Martino Valle Caudina (AV)

Office and Warehouse:

S.S. 7 Appia, Km. 237,00

82011 - Airola BN

ITALY

Tel. +39 0823 950 994

Fax +39 0823 412 546

www.lubeteam.it info@lubeteam.it

Italian VAT / C.F. e P.IVA: 01251720627

Follow us



This document is the property of LubeTeam Hydraulic S.r.l. All data reported here are for the exclusive use of the Receiver. Reproduction is not authorized without writing permission, in all or in part of the content of this document, in accordance to Law 633 art. 171, dated April 22, 1941.

Il presente documento è di proprietà della LubeTeam Hydraulic S.r.l. I dati riportati sono per esclusivo del destinatario. La riproduzione, di tutto o in parte, non è autorizzata senza permesso scritto secondo l'art. 171 della L. 633 del 22 Aprile 1941.