




UFI FILTERS
CBC



HYDRAULIC
COMPONENTS
& FLUID CONTAMINATION
CONTROL

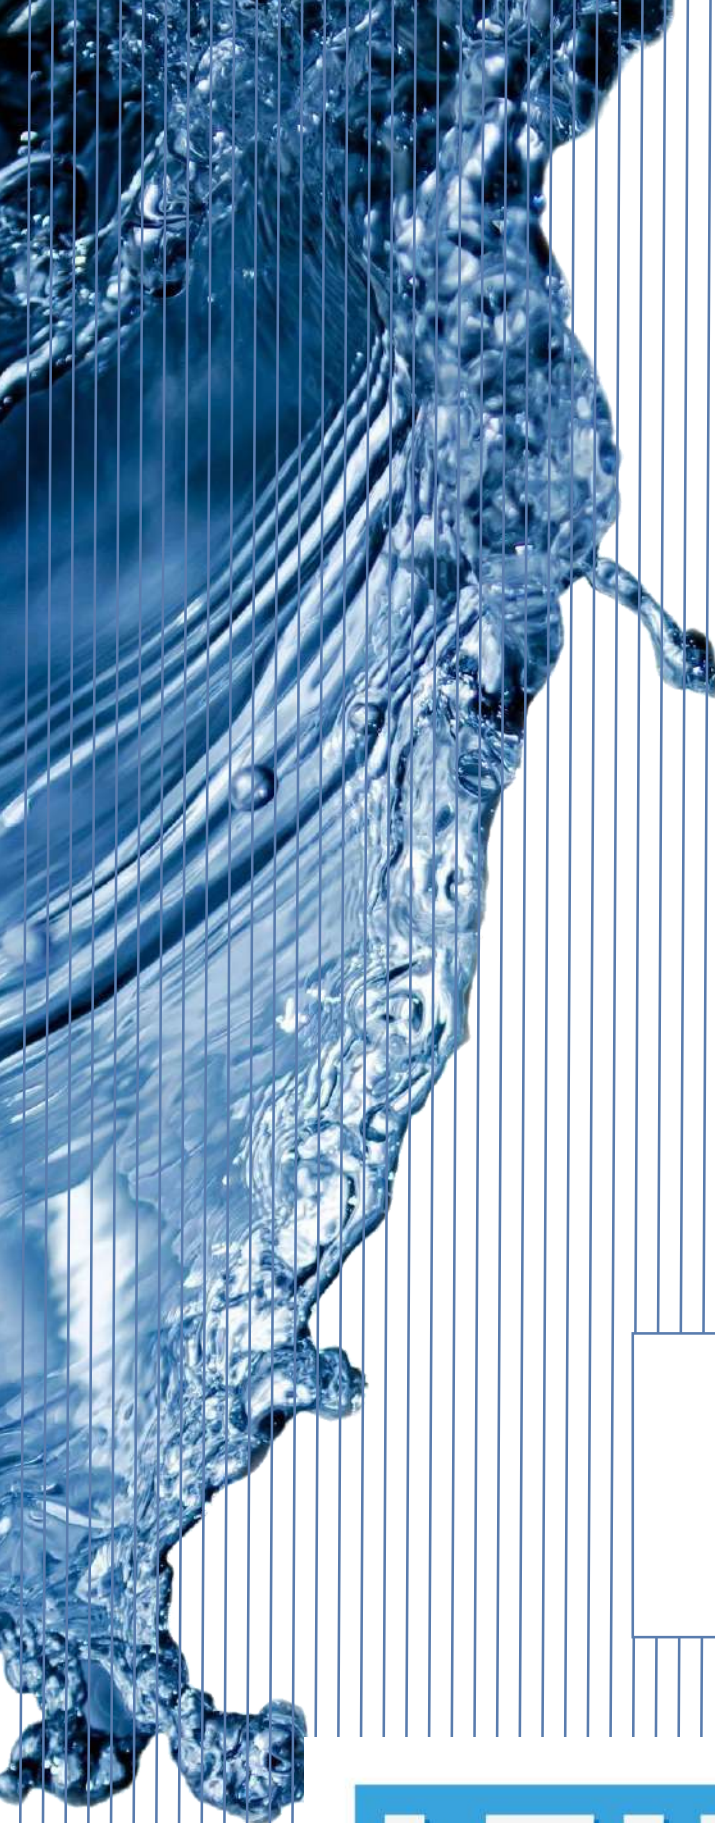

CBC AIR FILTERS

DESCRIPTION

Air breather filter, extension tube available on request

MATERIALS

Housing: Plastic

Basket: Plastic

Seal: NBR Nitrile

Spare filter element: Impregnated Cellulose 3µm

(Filtration degree in air)

FLOW RATE

Qmax 1800 l/min

COMPATIBLY

Full with fluids HH-HL-HM-HV-HTG (according to ISO 6743/4).


For fluids different than the above mentioned, please contact our Customer Service.

WORKING TEMPERATURE

From -25°C to 110°C



HYDRAULIC DIAGRAM




Is this datasheet the latest release? Please check on our website

ORDERING AND OPTION CHART

C	B	C	COMPLETE FILTER FAMILY		FILTER ELEMENT FAMILY	E	B	C
2	1		SIZE & LENGHT	21	SIZE & LENGTH	2	1	
			CONNECTION TYPE					
			S = flange	S				
			PORT SIZE					
			00 = DIN 24557/2	00				
W			PRESSURIZATION VALVE					
			W = without	W				
N			SEALS		SEALS	N		
			N = NBR Nitrile	N				
C	C		FILTER MEDIA		FILTER MEDIA	C	C	
			CC = impregnated cellulose 3 µm	CC				
W			ACCESSORIES					
			W = without	W				

INSTALLATION DRAWING

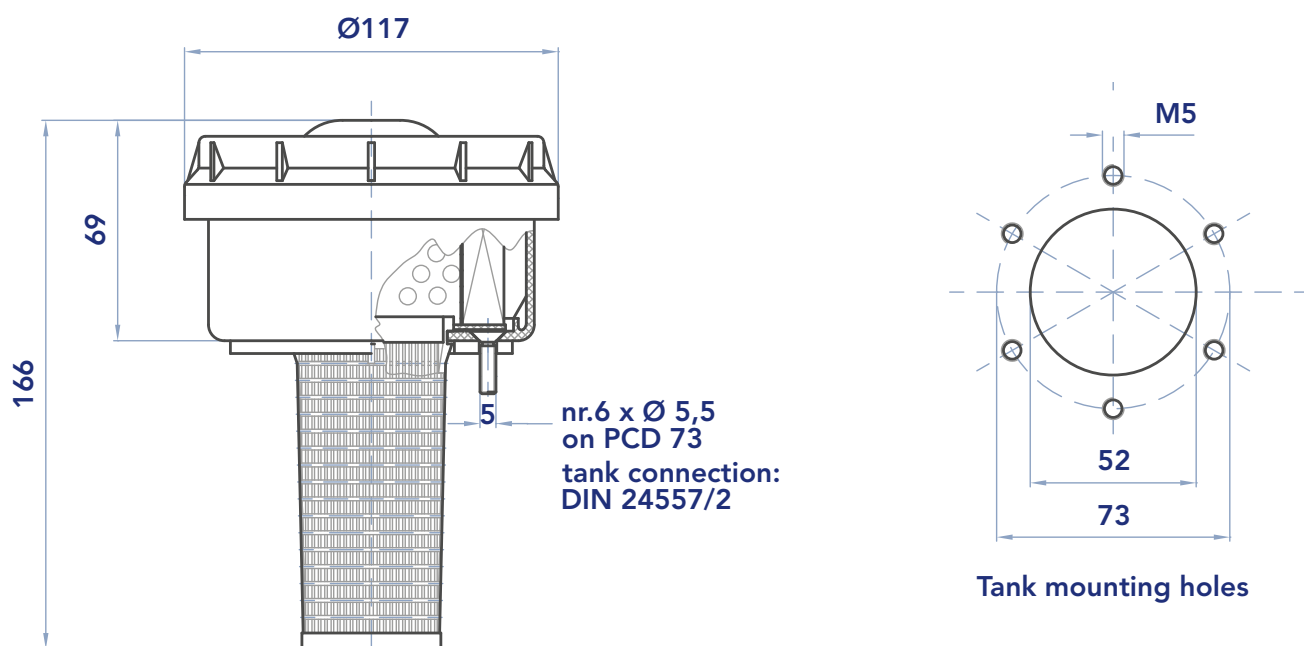

LubeTeam Hydraulic S.r.l.

Administration and Headquarter:

Via Tufara Scautieri, 6

83018 - San Martino Valle Caudina (AV)

Office and Warehouse:

S.S. 7 Appia, Km. 237,00

82011 - Airola BN

ITALY

Tel. +39 0823 950 994

Fax +39 0823 412 546

www.lubeteam.it info@lubeteam.it

Italian VAT / C.F. e P.IVA: 01251720627

Follow us



This document is the property of LubeTeam Hydraulic S.r.l. All data reported here are for the exclusive use of the Receiver. Reproduction is not authorized without writing permission, in all or in part of the content of this document, in accordance to Law 633 art. 171, dated April 22, 1941.

Il presente documento è di proprietà della LubeTeam Hydraulic S.r.l. I dati riportati sono per esclusivo del destinatario. La riproduzione, di tutto o in parte, non è autorizzata senza permesso scritto secondo l'art. 171 della L. 633 del 22 Aprile 1941.