

UFI FILTERS  
FLA



 HYDRAULIC  
COMPONENTS  
& FLUID CONTAMINATION  
CONTROL



# FLA

## PRESSURE FILTERS

### DESCRIPTION

Inline high pressure last chance filter

### MATERIALS

Housing: Aluminum  
Seals: NBR Nitrile

### PRESSURE

Max. working: 21 MPa (210 bar)  
Collapse, differential for the filter element:  
8 MPa (80 bar)

### FLOW RATE


Qmax 35 l/min

### WORKING TEMPERATURE

From -25° to +110° C

### COMPATIBILITY (ISO 2943)

Full with fluids: HH-HL-HM-HV-HTG  
(according to ISO 6743/4)  
For fluids different than the above mentioned,  
please contact our Customer Service

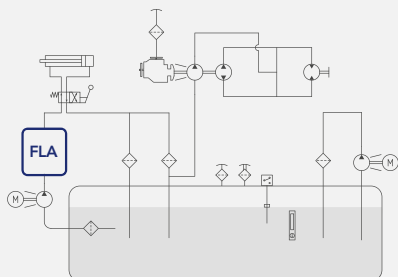

Is this datasheet the latest release? Please check on our website



# FLA

## PRESSURE FILTERS

### ORDERING AND OPTION CHART

F	L	A	COMPLETE FILTER FAMILY		FILTER ELEMENT FAMILY	E	L	A
			SIZE & LENGTH	11	SIZE & LENGTH			
		B	PORT TYPE					
			B = BSP thread	B				
			PORT SIZE					
			03 = 3/8"	03				
			04 = 1/2"	04				
		W	BYPASS VALVE					
			W = without	W				
			SEALS		SEALS			
			N = NBR Nitrile	N				
			F = FKM Fluoroelastomer	F				
			FormulaUFI MEDIA		FormulaUFI MEDIA			
			MD = FormulaUFI.WEB 30 µm	MD				
			ME = FormulaUFI.WEB 60 µm	ME				
			MF = FormulaUFI.WEB 90 µm	MF				
			MG = FormulaUFI.WEB 250 µm	MG				
0	0		CLOGGING INDICATOR					
			00 = without predisposition	00				
X	X		ACCESSORI / ACCESSORIES					
			XX = without accessories	XX				

### SPARE PARTS


FILTER HOUSING	FILTER ELEMENT
	
B L A 1 1 B W X X 0 0 X X	E L A

### SPARE SEAL KIT

	NBR	FKM
FLA11	021.0205.2	021.0206.2



INSTALLATION DRAWING

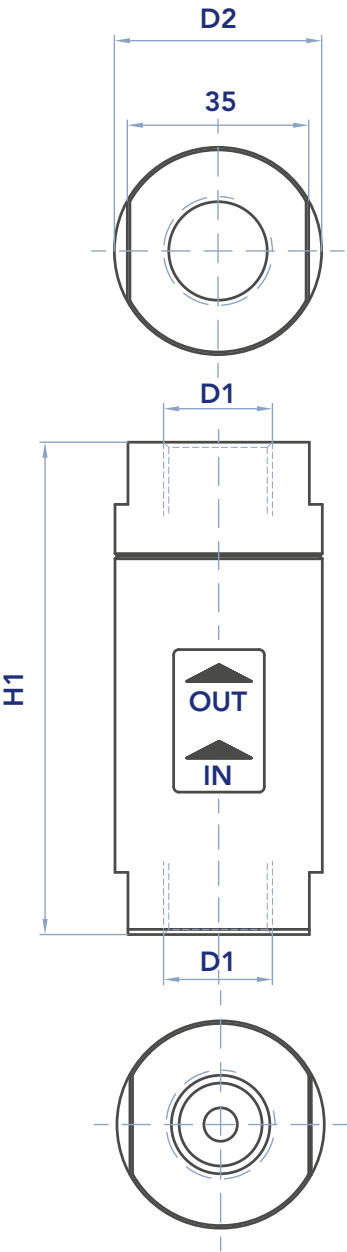

FILTER HOUSING


	D1	D2	H1	kg
FLA11	3/8" - 1/2" BSP	40,0	95,0	0,24

# FLA

## PRESSURE FILTERS


### FILTER ELEMENT

	A	B	C	Kg	AREA (cm <sup>2</sup> ) Media M+
ELA11	25	7	47	0,04	72

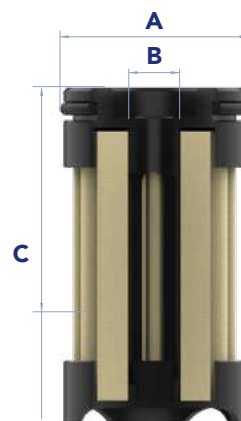

### MAINTENANCE

- 1) Stop the system and verify there is no pressure in the filter.
- 2) Collect the oil inside the filter with a suitable container.
- 3) Unscrew the plug (1).
- 4) Remove the dirty filter element (2).  
N.B. The exhausted filter elements and the oil dirty filter parts are classified "Dangerous waste material" and must be disposed of according to the local laws, by authorised Companies.
- 5) Check the filter element part number on the filter label or in the ordering and option chart.  
Use only original spare parts.
- 6) Lubricate the element o-ring gasket (3) with oil.
- 7) Insert the clean element into the plug (1) with care.
- 8) Check the housing o-ring condition (4) and lubricate with oil.  
If damaged, check the seal kit part number in the spare seal kit table.
- 9) Screw the plug (1) on the housing (5) it stops, with a tightening torque of 45 Nm +5/0.

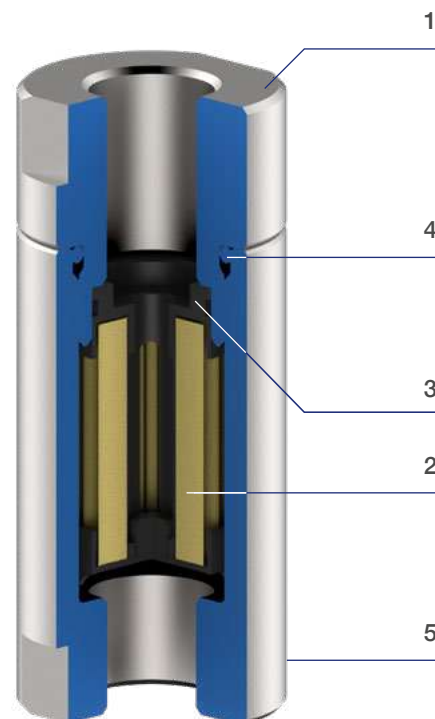






## PRESSURE DROP CURVES ( $\Delta p$ )


The “Assembly Pressure Drop ( $\Delta p$ )” is obtained by adding the pressure drop values of the Filter Housing and of the Clean Filter

Element corresponding to the considered Flow Rate and it must be lower than 120 kPa (1,2 bar).

**FILTER HOUSING PRESSURE DROP**  
(mainly depending on the port size)

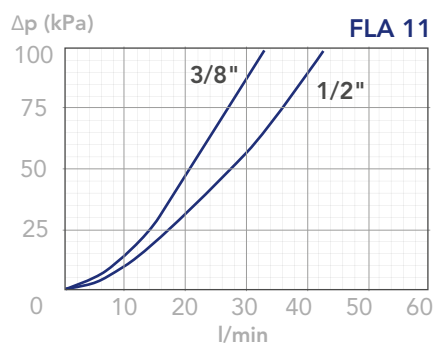

**CLEAN FILTER ELEMENT PRESSURE DROP WITH M+ MEDIA**  
(depending both on the internal diameter of the element and on the filter media)

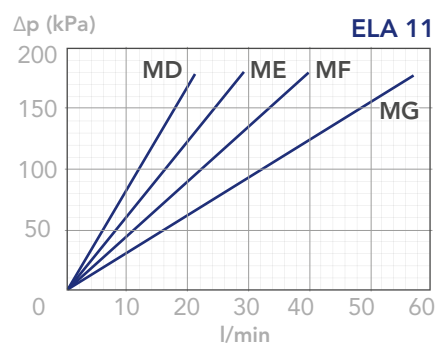

### N.B.

All the curves have been obtained with mineral oil having a kinematic viscosity 30 cSt and specific gravity 0,86 kg/dm<sup>3</sup>; for fluids with different features, please consider the factors described in the first part of this catalogue. All the curves are

obtained from test done at the UFI FILTERS HYDRAULICS Laboratory, according to the specification ISO 3968:2005. In case of discrepancy, please check the contamination level, viscosity and features of the fluid in use.

## LubeTeam Hydraulic S.r.l.

*Administration and Headquarter:*

Via Tufara Scautieri, 6

83018 - San Martino Valle Caudina (AV)

*Office and Warehouse:*

S.S. 7 Appia, Km. 237,00

82011 - Airola BN

ITALY

Tel. +39 0823 950 994

Fax +39 0823 412 546

[www.lubeteam.it](http://www.lubeteam.it) [info@lubeteam.it](mailto:info@lubeteam.it)

Italian VAT / C.F. e P.IVA: 01251720627

Follow us



This document is the property of LubeTeam Hydraulic S.r.l. All data reported here are for the exclusive use of the Receiver. Reproduction is not authorized without writing permission, in all or in part of the content of this document, in accordance to Law 633 art. 171, dated April 22, 1941.

Il presente documento è di proprietà della LubeTeam Hydraulic S.r.l. I dati riportati sono per esclusivo del destinatario. La riproduzione, di tutto o in parte, non è autorizzata senza permesso scritto secondo l' art. 171 della L. 633 del 22 Aprile 1941.