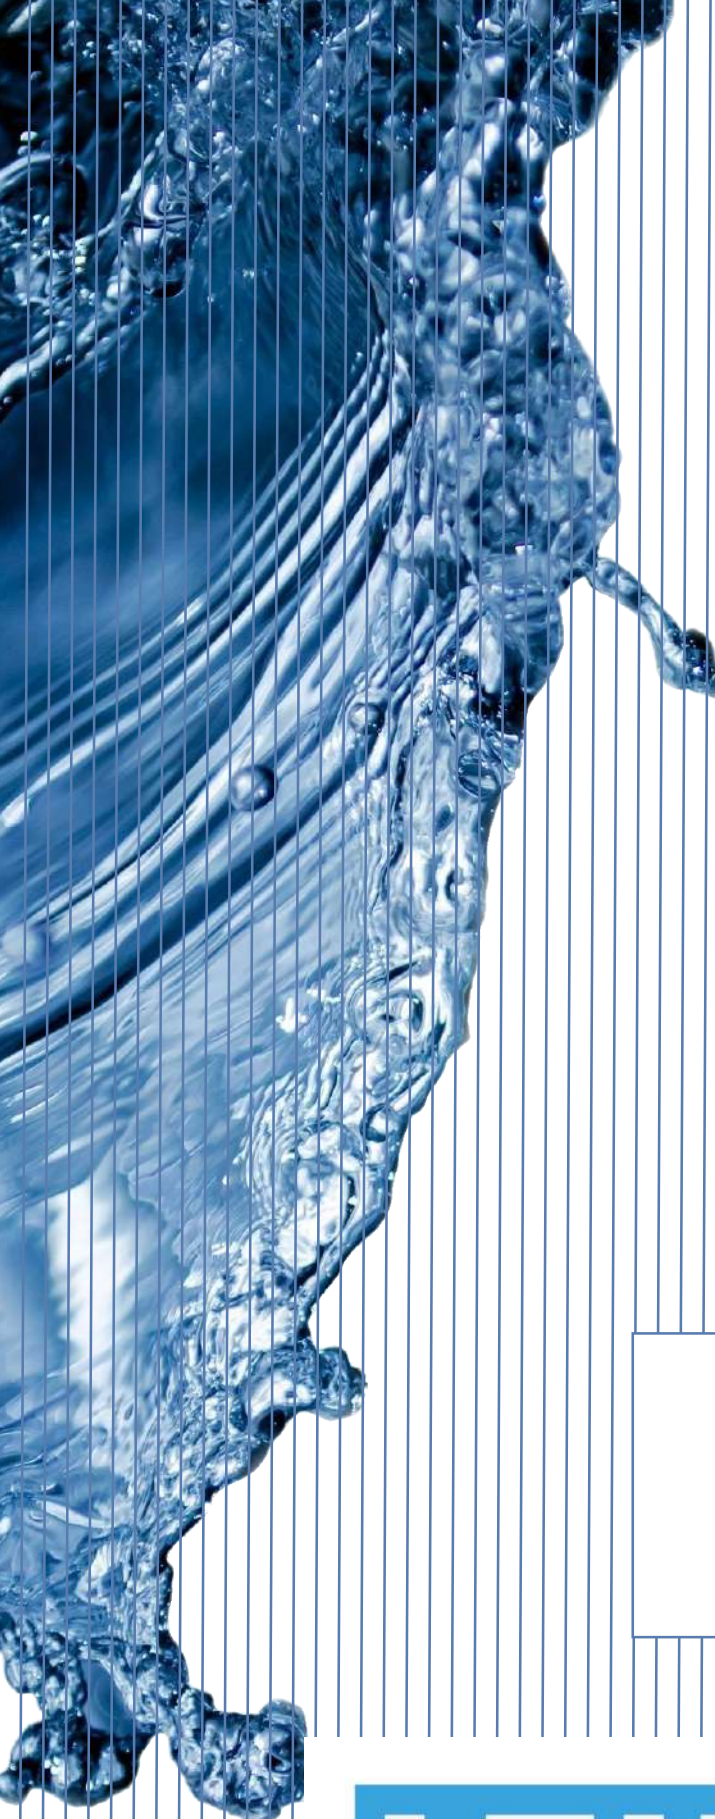




UFI FILTERS
OFF-LINE FILTERS - CLOGGING
INDICATORS



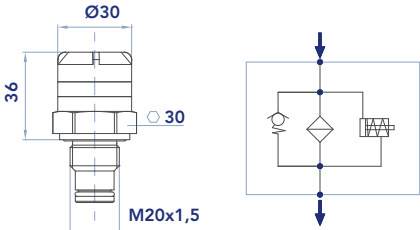
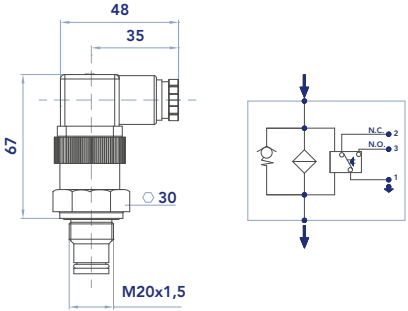
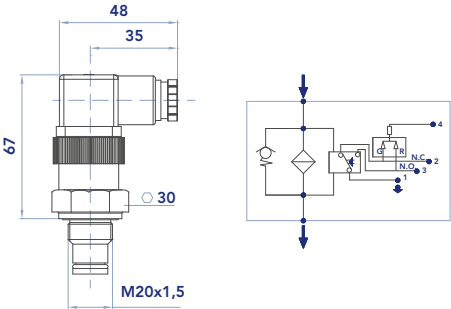
 HYDRAULIC
COMPONENTS
& FLUID CONTAMINATION
CONTROL

OFF-LINE FILTERS

CLOGGING INDICATORS

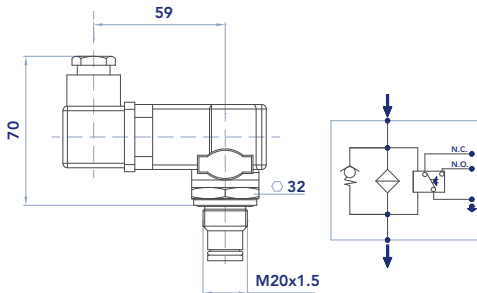
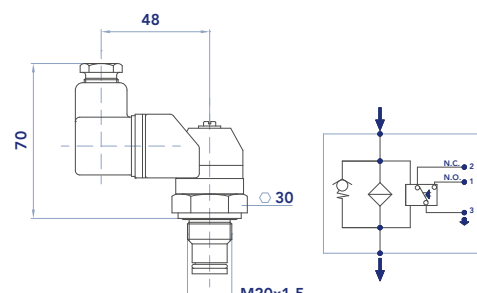
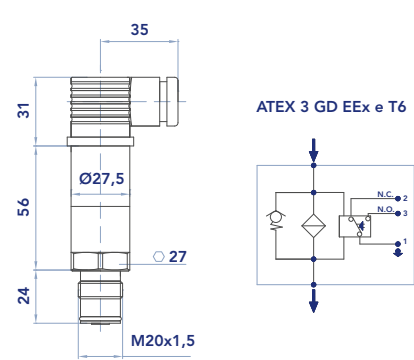


INDICATOR SERIE DESCRIPTION FOR OFF-LINE FILTERS SERIES

NBR	FKM	Differential VISUAL indicators	
5B	AB	Setting 130 kPa (1,3 bar)	FOF - UOW
			
NBR	FKM	Differential ELECTRICAL indicators	
6B	CB	Setting 130 kPa (1,3 bar)	FOF - UOW
			
		SPDT differential switch. C.C. 14 - 30 V: > max resistive or inductive load 4 - 3 A respectively C.A. 125-250 V: > max resistive or inductive load 1 A - Protection IP65 - Connector DIN 43650	
NBR	FKM	Differential ELECTRICAL indicators with LED (24 V) for visual indication	
7B	EB	Setting 130 kPa (1,3 bar)	FOF - UOW
			
		SPDT differential switch. C.C. 14 - 30 V: > max resistive or inductive load 4 - 3 A respectively C.A. 125-250 V: > max resistive or inductive load 1 A - Protection IP65 - Connector DIN 43650	



INDICATOR SERIE DESCRIPTION FOR OFF-LINE FILTERS SERIES

NBR	FKM	Differential ELECTRICAL indicators with THERMOSTAT 30° C	
T0	DB	Setting 130 kPa (1,3 bar)	FOF - UOW 
		SPDT differential switch. C.C. 14 - 30 V: > max resistive or inductive load 4 - 3 A respectively C.A. 125-250 V: > max resistive or inductive load 1 A - Protection IP65 - Connector DIN 43650	
NBR	FKM	Differential VISUAL ELECTRICAL indicators	
70	E0	Setting 130 kPa (1,3 bar)	FOF - UOW 
		SPDT differential switch. C.C. 14 - 30 V: > max resistive or inductive load 4 - 3 A respectively C.A. 125-250 V: > max resistive or inductive load 1 A - Protection IP65 - Connector DIN 43650	
NBR	FKM	Differential ELECTRICAL indicators ATEX	
008.0239.2	-	Setting 130 kPa (1,3 bar)	FOF - UOW 
		SPDT differential switch. C.C. 14 - 30 V: > max resistive or inductive load 4 - 3 A respectively C.A. 125-250 V: > max resistive or inductive load 1 A - Protection IP65 - Connector DIN 43650	



INDICATOR SERIE DESCRIPTION FOR OFF-LINE FILTERS SERIES

NBR	FKM	ELECTRONICAL differential pressure clogging indicator	
008.0265.2	-	Setting 150 kPa (75%) - Setting 200kPa (100%) PNP-NO	FOF
		PIN1:24V +/-10%. - PIN2: Analogue output 4-20mA - For input < 25%FS analogue signal output is constant at 4mA - Accuracy at 25°C, for input >25%FS =+/-5%FS max; - PIN3: Digital output 1 calibrated at 1,5bar – PNP – Max Load 0,2A – NO - PIN4: Digital output 2 calibrated at 2,0bar – PNP – Max Load 0,2A – NO - PIN5: 0V – GND Protection IP67 - Connector: M12x5PIN	

LubeTeam Hydraulic S.r.l.

Administration and Headquarter:

Via Tufara Scautieri, 6

83018 - San Martino Valle Caudina (AV)

Office and Warehouse:

S.S. 7 Appia, Km. 237,00

82011 - Airola BN

ITALY

Tel. +39 0823 950 994

Fax +39 0823 412 546

www.lubeteam.it info@lubeteam.it

Italian VAT / C.F. e P.IVA: 01251720627

Follow us



This document is the property of LubeTeam Hydraulic S.r.l. All data reported here are for the exclusive use of the Receiver. Reproduction is not authorized without writing permission, in all or in part of the content of this document, in accordance to Law 633 art. 171, dated April 22, 1941.

Il presente documento è di proprietà della LubeTeam Hydraulic S.r.l. I dati riportati sono per esclusivo del destinatario. La riproduzione, di tutto o in parte, non è autorizzata senza permesso scritto secondo l'art. 171 della L. 633 del 22 Aprile 1941.