




STAUFF
IN-LINE FILTERS
SRFL-SW



HYDRAULIC
COMPONENTS
& FLUID CONTAMINATION
CONTROL

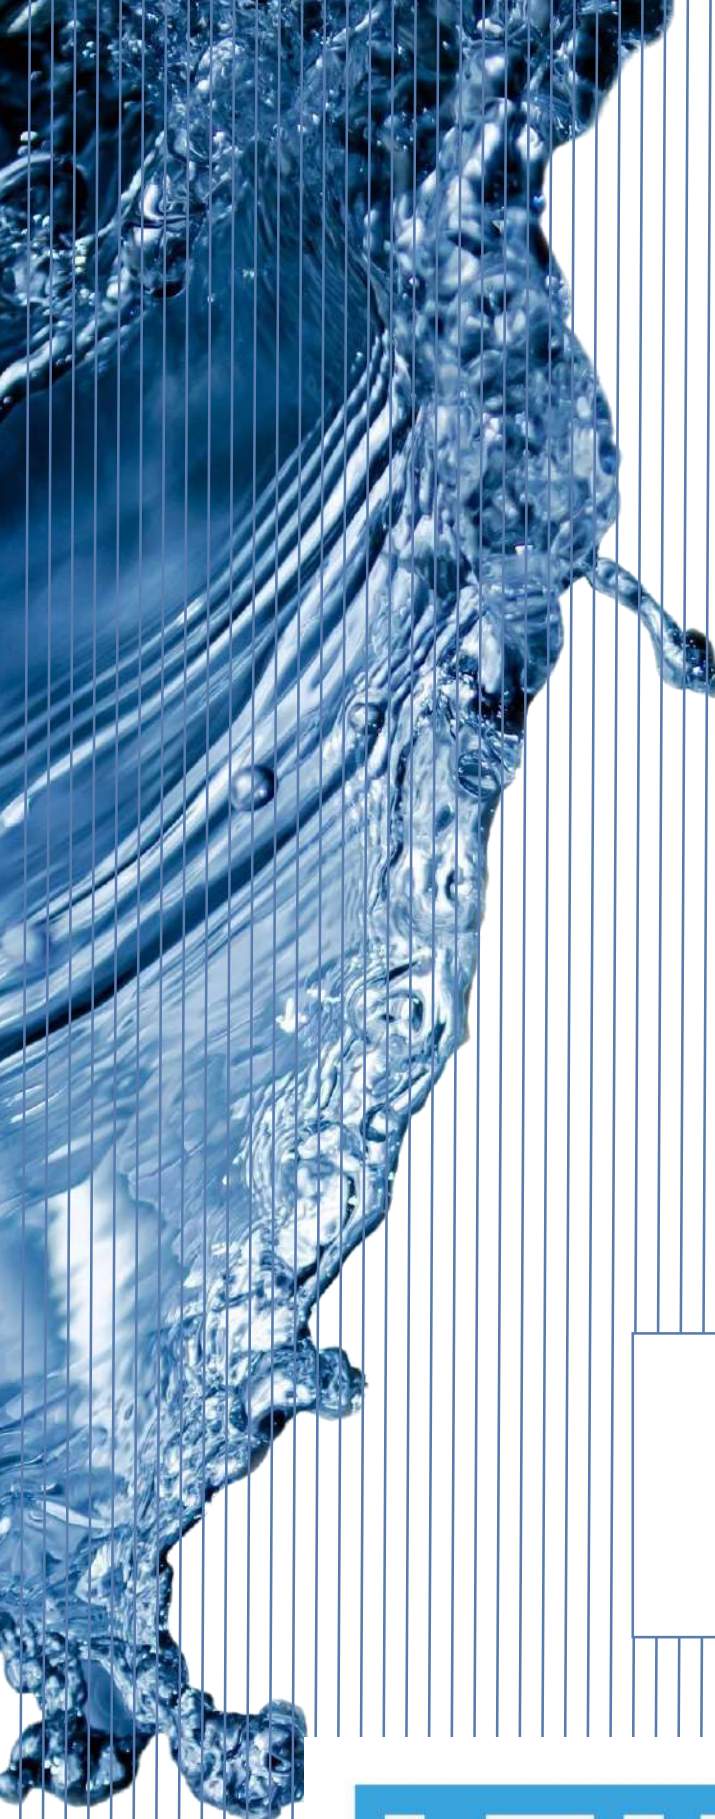

All trademarks belong to their respective owners; third party trademarks, product names, trade names, corporate names and company names mentioned may be trademarks of their respective owners or registered trademarks of other companies and are used for instructional purposes and for the benefit of the owner, without any end of Copyright infringement in force.

Tutti i marchi riportati appartengono ai legittimi proprietari; marchi di terzi, nomi di prodotti, nomi commerciali, nomi corporativi e società citati possono essere di proprietà dei rispettivi titolari o registrati da altre società e sono stati utilizzati a puro scopo esplicativo e a beneficio del possessore, senza alcun fine di violazione dei diritti di Copyright vigenti.

In-Line Filters ■ Type SRFL-SW



E

Product Description

STAUFF In-Line Filters SRFL-SW are specially developed for direct installation into the pipelines of industrial water cycles. Depending on their size, SRFL-SW filter housings are suitable for nominal flow rates up to 13330 l/min / 3521 US GPM at a maximum operating pressure of 16 bar / 232 PSI. The SRFL-SW have been designed to be used in the steel industry for pre-filtering or coarse filtering in descaling plants. For use with demineralised water we recommend the In-Line Filters SRFL-SW in Stainless Steel. The filter element construction as a Stainless Steel basket screen filter ensures a long service life.

Technical Data

Construction

- Designed for direct installation into pipelines
- Simplex version, Duplex on request

Materials

- Filter housing: Carbon Steel
Stainless Steel (on request)
- Sealing: PTFE / NBR (Buna-N®)
PTFE / FKM (Viton®)

Port Connections

- ANSI or DIN flange

Operating Pressure

- Max. 16 bar / 232 PSI

Flow Rating

- Max. 13330 l/min / 3521 US GPM

Temperature Range

- -10 °C ... +100 °C / +14 °F ... +212 °F

Media Compatibility

- Water
- Coolant
- Others on request

Options and Accessories

Filter Elements

Stainless Steel basket screen filters from STAUFF's REL product line are used as filter elements, which are designed for flow from the inside to the outside. The filter elements are available in micron ratings between 50 µm and 200 µm. Solid particles collected in the basket are prevented from reaching the clean side of the water cycle when being replaced.

Clogging Indicator

- Differential Pressure Gauge
- visual / electrical / visual-electrical (see page 54)

Drain Valve



- Available as an option: Integrated into the filter housing




In-Line Filters ■ Type SRFL-SW-160 /-300 /-600

Version with handle


* recommended space for element change

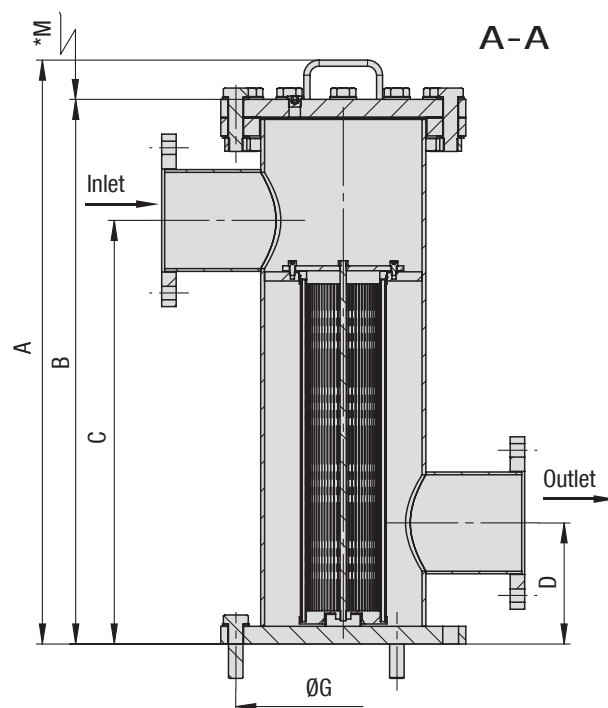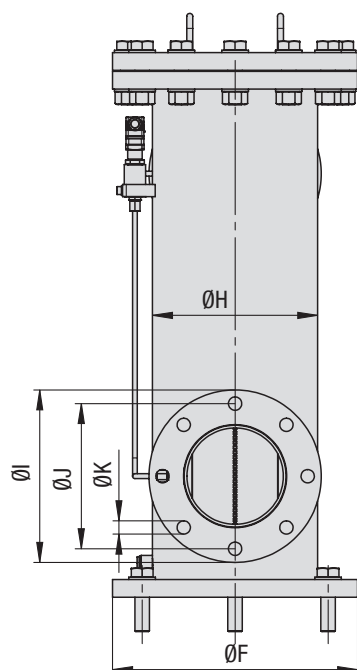

Detail arrangement of filter elements



Flange Connection	Filter Size SRFL-SW		
	160	300	600
DIN	DN80	DN100	DN150
	DN50	DN125	-
ANSI	2	4	6
	3	5	-

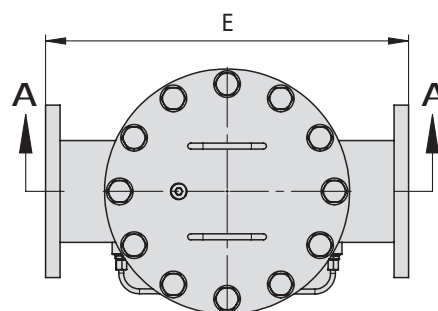



Dimensions (mm/in)		Filter Size SRFL-SW		
		160	300	600
Filter Housing Material		CS/SS	CS/SS	CS/SS
A		840	965	965
		33.07	38.00	38.00
B		775	900	900
		30.51	35.43	35.43
C		600	700	700
		23.62	27.56	27.56
D		250	200	200
		9.84	7.87	7.87
E		440	500	600
		17.32	19.69	23.62
ØF		340	340	405
		13.39	13.39	15.94
ØG		295	295	355
		11.61	11.61	13.98
ØH		219,1	219,1	273
		8.63	8.63	10.75
ØI		200	220	285
		7.87	8.66	11.22
ØJ		160	180	240
		6.30	7.09	9.45
ØK		18	18	22
		.71	.71	.87
M		400	650	650
		15.75	25.60	25.60
Housing Capacity (l / US GPM)		26,2	31,3	52,9
		6.9	8.3	14
Filter Elements	Designation	REL-100	REL-100	REL-150
	Quantity	1	1	1




In-Line Filters ■ Type SRFL-SW-850 /-1000 /-1250

Version with lifting device

* recommended space for element change

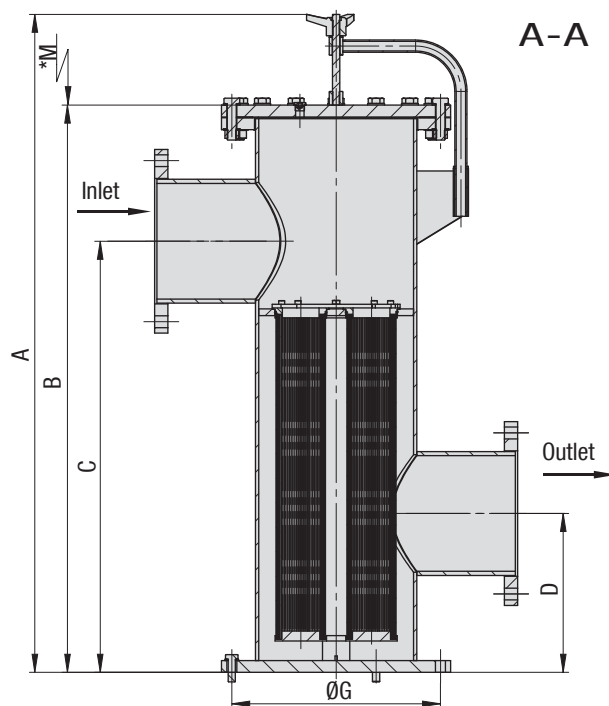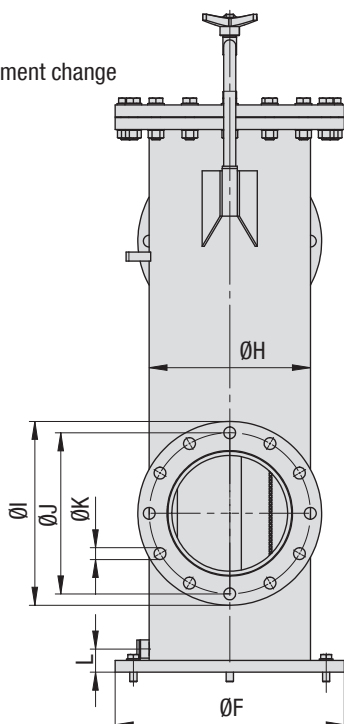

Detail arrangement for filter elements




SRFL-SW-850

SRFL-SW-1000

SRFL-SW-1250

Flange Connection	Filter Size SRFL-SW		
	850	1000	1250
DIN	DN200	DN250	DN300
	DN150	-	-
ANSI	8	10	12
	-	-	-

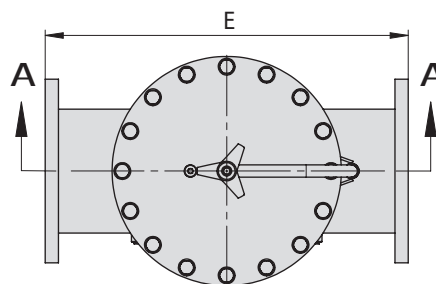

Dimensions (mm/in)		Filter Size SRFL-SW			
		850		1000	
Filter Housing Material		CS	SS	CS	SS
A		1154	1150	1442	1450
		45.43	45.28	56.77	57.09
B		962	950	1250	1250
		37.87	37.40	49.21	49.21
C		750	750	950	950
		29.53	29.53	37.40	37.40
D		300	300	350	350
		11.81	11.81	13.78	13.78
E		700	700	800	800
		27.56	27.56	31.50	31.50
ØF		520	505	520	505
		20.47	19.88	20.47	19.88
ØG		470	460	470	460
		18.50	18.11	18.50	18.11
ØH		355,6	355,6	355,6	355,6
		14.00	14.00	14.00	14.00
ØI		340	340	405	405
		13.39	13.39	15.94	15.94
ØJ		295	295	355	355
		11.61	11.61	13.98	13.98
ØK		22	22	26	26
		.87	.87	1.02	1.02
M		650	650	850	850
		25.59	25.59	33.46	33.46
L		55	51	55	51
		2.17	2.01	2.17	2.01
Housing Capacity (l / US GPM)		96,5	96,5	138,6	138,6
		25.5	25.5	36.6	36.6
Filter Elements	Designation	REL-150	REL-150	REL-250	REL-250
	Quantity	2	2	3	3



In-Line Filter Housing / Complete Filters ■ Type SRFL-SW

SRFL-SW - 300 - B - 200 - B - A - O - W132 - V - B / X

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪

① Type

In-Line Filter Simplex Water **SRFL-SW**

② Group

Flow	Size
650 l/min / 160 US GPM	160
1200 l/min / 300 US GPM	300
2500 l/min / 600 US GPM	600
6000 l/min / 1500 US GPM	850
8300 l/min / 2000 US GPM	1000
13330 l/min / 3300 US GPM	1250

③ Filter Material

Material	Micron Ratings Available	Code
Without filter element	-	0
Stainless mesh	50, 80, 100, 125, 200	B

④ Micron Rating

50 µm	50
80 µm	80
100 µm	100
125 µm	125
200 µm	200

Note: Other micron ratings on request.

⑤ Sealing Material

PTFE / NBR (Buna®)	B
PTFE / FKM (Viton®)	V

Note: Other sealing materials on request.

⑥ Connection Style

Connection Style	Group 160	300	600	850	1000	1250	Code
DIN flange	DN80	DN100	DN150	DN200	DN250	DN300	D
	DN50	DN125	-	DN150	-	-	D1
ANSI flange	2"	4"	6"	8"	10"	12"	A
	3"	5"	-	-	-	-	A1

⑦ Connection Location

Opposite side	0
---------------	----------

⑧ Housing Material

Carbon Steel	W132
Stainless Steel	W4

⑨ Clogging Indicator

Without Clogging Indicator	0
Differential Pressure Gauge	V

Note: Other clogging indicators on request.

⑩ Drain Valve

Closed	0
Ball Valve	B


⑪ Design Code

Only for information	X
----------------------	----------

Filter Elements ■ Type REL

Product Description

Stainless Steel basket screen filters from STAUFF's REL product line are used as filter elements, which are designed for flow from the inside to the outside. Micron ratings ranging from 50 µm to 200 µm are available. Solid particles collected in the basket are prevented from reaching the clean side of the water cycle when being replaced. The filter element construction as a Stainless Steel basket screen filter ensures a long service life.

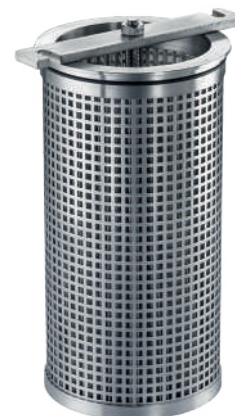

Order Code

REL - 150 - B - 200 - B / X

① ② ③ ④ ⑤ ⑥

① Type

Filter Element Series **REL**

② Group

Designation	Number of Filter Elements	Size
REL-100	1	160
REL-150	1	300
REL-150	1	600
REL-150	2	850
REL-250	3	1000
REL-250	5	1250

③ Filter Material

Material	Max. Δp*Collapse	Micron Ratings Available	Code
Stainless mesh	10 bar / 145 PSI	50, 80, 100, 125, 200	B

④ Micron Rating

50 µm	50
80 µm	80
100 µm	100
125 µm	125
200 µm	200

⑤ Sealing Material

NBR (Buna®)	B
FKM (Viton®)	V

⑥ Design Code

Only for information	X
----------------------	----------



LubeTeam Hydraulic S.r.l.

Administration and Headquarter:

Via Tufara Scautieri, 6

83018 - San Martino Valle Caudina (AV)

Office and Warehouse:

S.S. 7 Appia, Km. 237,00

82011 - Airola BN

ITALY

Tel. +39 0823 950 994

Fax +39 0823 412 546

www.lubeteam.it info@lubeteam.it

Italian VAT / C.F. e P.IVA: 01251720627

Follow us



This document is the property of LubeTeam Hydraulic S.r.l. All data reported here are for the exclusive use of the Receiver. Reproduction is not authorized without writing permission, in all or in part of the content of this document, in accordance to Law 633 art. 171, dated April 22, 1941.

Il presente documento è di proprietà della LubeTeam Hydraulic S.r.l. I dati riportati sono per esclusivo del destinatario. La riproduzione, di tutto o in parte, non è autorizzata senza permesso scritto secondo l'art. 171 della L. 633 del 22 Aprile 1941.