






Collari in metallo Stauff DIN 1593

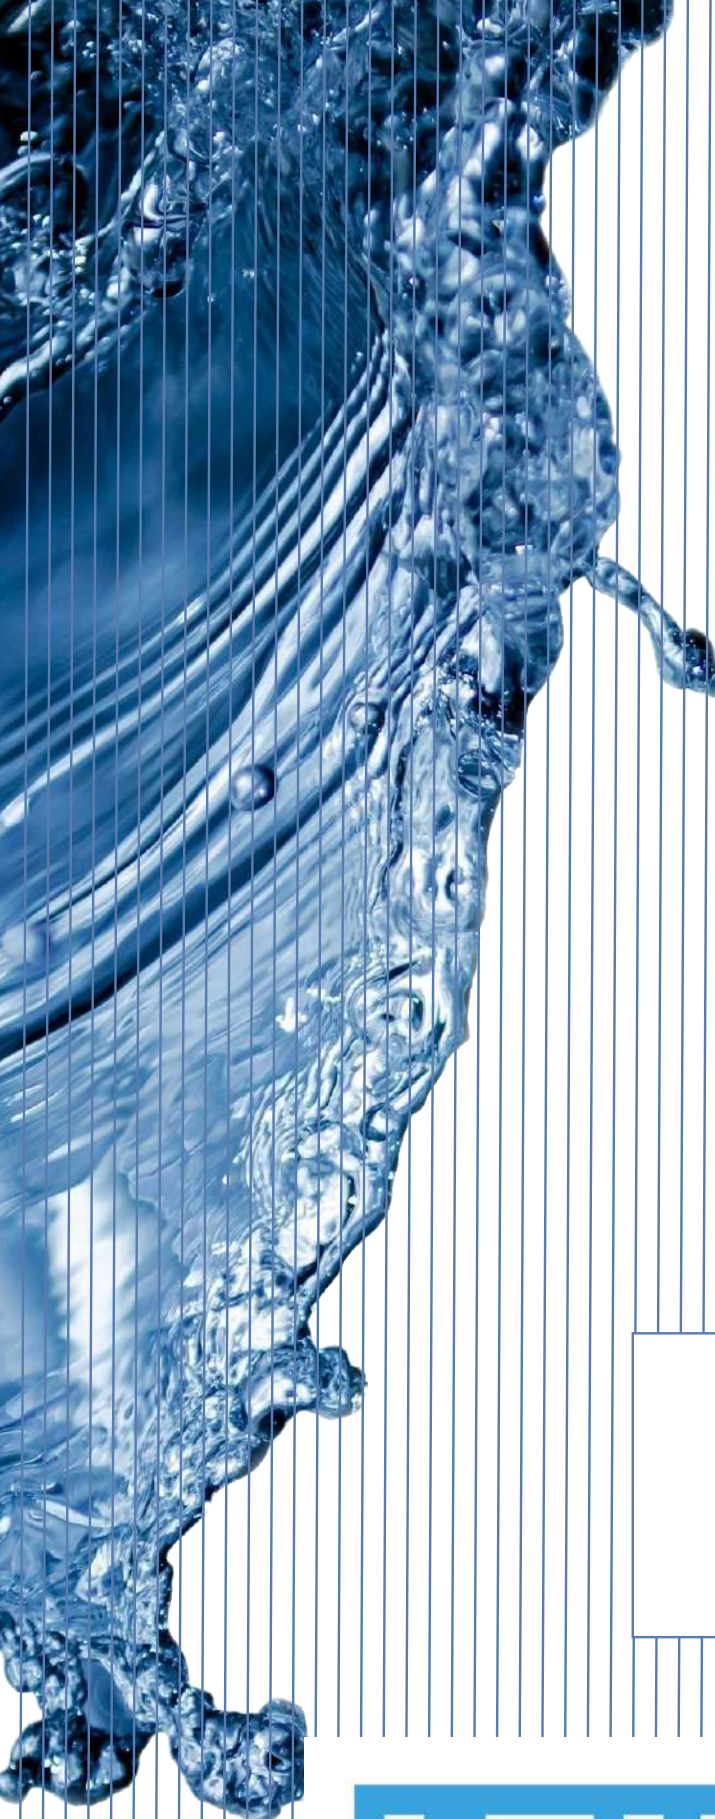

 HYDRAULIC
COMPONENTS
& FLUID CONTAMINATION
CONTROL

Heavy Saddle with Tension Clearance (DIN 1593) Two-Bolt Design

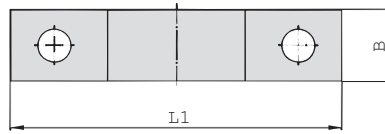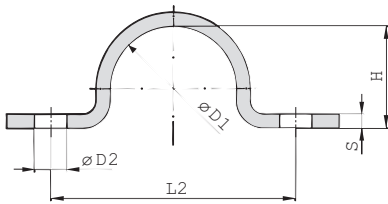

STAUFF Group	Diameter Range		Dimensions (mm/in)					
	Ø D1	(mm) (in)	L1	L2	H	D2	B	S
7	5,5 ... 7	.2228	44	28	5	6,6	16	2
			1.73	1.10	.20	.26	.63	.08
9	7 ... 9	.2835	48	32	6	6,6	20	2
			1.89	1.26	.24	.26	.79	.08
13	9,5 ... 13	.3951	52	36	9	6,6	20	2
			2.05	1.42	.35	.26	.79	.08
15,5	13 ... 15,5	.5161	56	40	12	6,6	20	2
			2.20	1.57	.47	.26	.79	.08
19	15,5 ... 19	.6175	60	44	15	6,6	20	2
			2.36	1.73	.59	.26	.79	.08
23	20 ... 23	.7991	82	56	19	11	25	3
			3.23	2.20	.75	.43	.98	.12
26	23 ... 26	.91 ... 1.02	84	58	22	11	25	3
			3.31	2.28	.87	.43	.98	.12
28,5	26 ... 28,5	1.02 ... 1.12	90	64	24	11	25	3
			3.54	2.52	.94	.43	.98	.12
31	28,5 ... 31	1.12 ... 1.22	90	64	27	11	25	3
			3.54	2.52	1.06	.43	.98	.12
36	33 ... 36	1.30 ... 1.42	106	80	32	11	30	5
			4.17	3.15	1.26	.43	1.18	.20
39	36 ... 39	1.42 ... 1.54	110	84	34	11	30	5
			4.33	3.31	1.34	.43	1.18	.20
43	39 ... 43	1.54 ... 1.69	120	88	38	14	30	5
			4.72	3.46	1.50	.55	1.18	.20
46	43 ... 46	1.69 ... 1.81	122	90	41	14	30	5
			4.80	3.54	1.61	.55	1.18	.20
49	46 ... 49	1.81 ... 1.93	122	90	44	14	30	5
			4.80	3.54	1.73	.55	1.18	.20
58	53 ... 58	2.09 ... 2.28	142	110	52	14	40	5
			5.59	4.33	2.05	.55	1.57	.20
61	58 ... 61	2.28 ... 2.40	142	110	57	14	40	5
			5.59	4.33	2.24	.55	1.57	.20
71	67 ... 71	2.64 ... 2.80	152	120	66	14	40	5
			5.98	4.72	2.60	.55	1.57	.20
77	73 ... 77	2.87 ... 3.03	176	136	72	18	40	5
			6.93	5.35	2.83	.71	1.57	.20
81	77 ... 81	3.03 ... 3.19	184	144	76	18	40	5
			7.24	5.67	2.99	.71	1.57	.20
91	88 ... 91	3.39 ... 3.58	198	158	85	18	40	8
			7.80	6.22	3.35	.71	1.57	.31
103	99 ... 103	3.90 ... 4.06	214	174	98	18	40	8
			8.43	6.85	3.86	.71	1.57	.31
109	105 ... 109	4.13 ... 4.29	220	180	104	18	40	8
			8.66	7.09	4.09	.71	1.57	.31
115	110 ... 115	4.33 ... 4.53	226	186	109	18	40	8
			8.90	7.32	4.29	.71	1.57	.31

Ordering Codes

Heavy Saddle

***DIN1593-7-W66**

* Heavy Saddle to DIN 1593	DIN1593
* STAUFF Group (Ø D1)	7
* Material code	Carbon Steel, uncoated
	Carbon Steel, zinc-plated and thick-film passivated
	Stainless Steel V4A
	1.4401 / 1.4571 (AISI 316 / 316 Ti)
	W1
	W66
	W5

Applications

- Installation of pipes, tubes, poles and other round components directly on the substrate (floor, wall or ceiling)

Alternative materials and surface finishings are available upon request. Contact STAUFF for further information.



LubeTeam Hydraulic S.r.l.

Administration and Headquarter:

Via Tufara Scautieri, 6

83018 - San Martino Valle Caudina (AV)

Office and Warehouse:

S.S. 7 Appia, Km. 237,00

82011 - Airola BN

ITALY

Tel. +39 0823 950 994

Fax +39 0823 412 546

www.lubeteam.it info@lubeteam.it

Italian VAT / C.F. e P.IVA: 01251720627

Follow us



This document is the property of LubeTeam Hydraulic S.r.l. All data reported here are for the exclusive use of the Receiver. Reproduction is not authorized without writing permission, in all or in part of the content of this document, in accordance to Law 633 art. 171, dated April 22, 1941.

Il presente documento è di proprietà della LubeTeam Hydraulic S.r.l. I dati riportati sono per esclusivo del destinatario. La riproduzione, di tutto o in parte, non è autorizzata senza permesso scritto secondo l'art. 171 della L. 633 del 22 Aprile 1941.