






Collari in metallo Stauff
DIN 1596

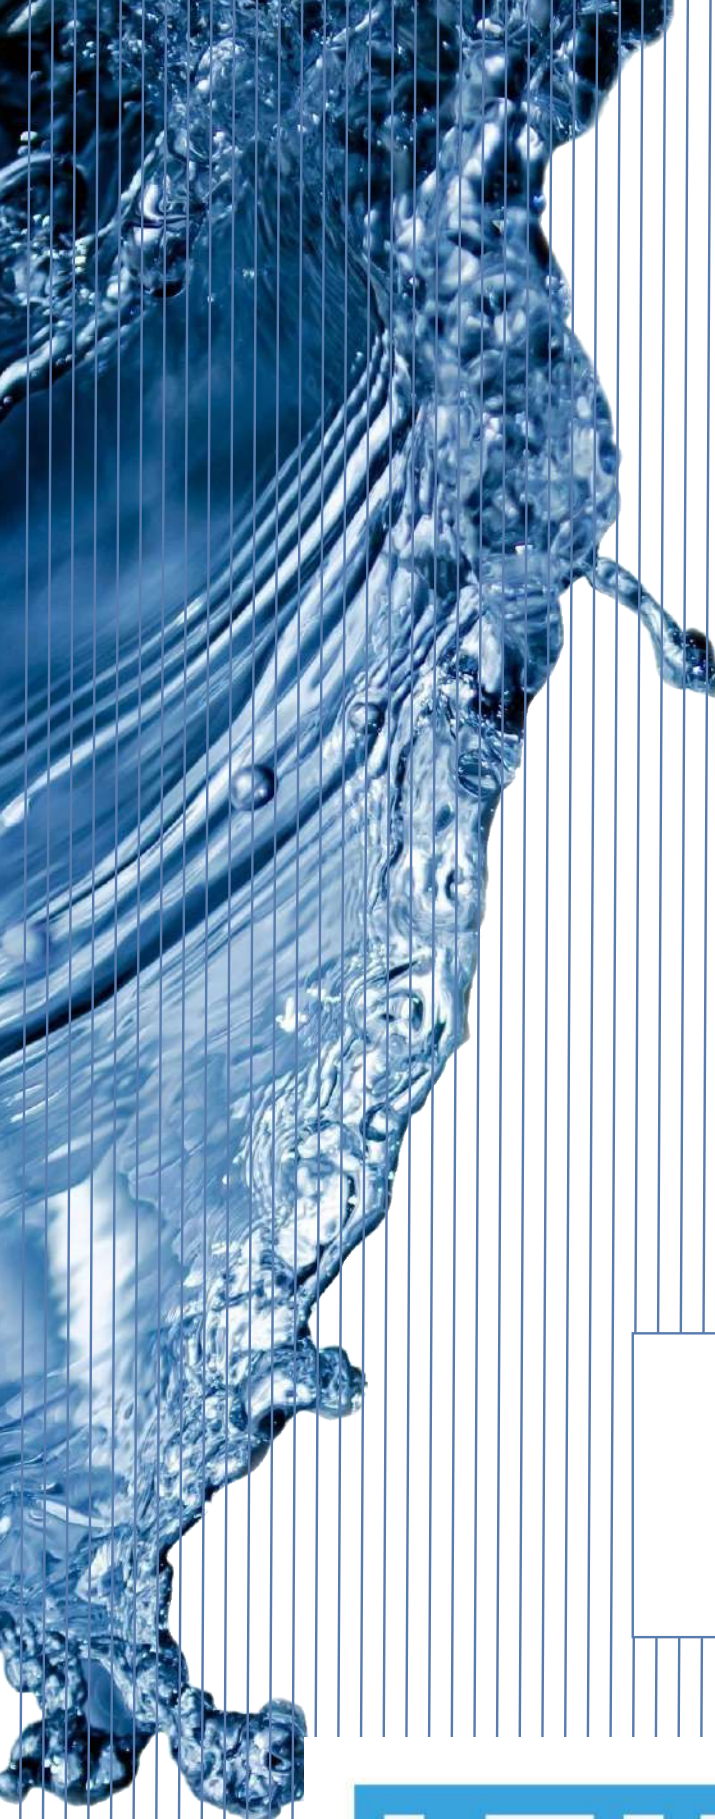

HYDRAULIC
COMPONENTS
& FLUID CONTAMINATION
CONTROL

Light Saddle with Tension Clearance (DIN 1596)

Single-Bolt Design



Ordering Codes

Light Saddle

***DIN1596-*7-*W66**

* Light Saddle to DIN 1596

DIN1596

* STAUFF Group (Ø D1)

7

* Material code Carbon Steel, uncoated
Carbon Steel, zinc-plated
and thick-film passivated

W1

W66

Stainless Steel V4A

1.4401 / 1.4571 (AISI 316 / 316 Ti)

W5

Applications

- Installation of pipes, tubes, poles and other round components directly on the substrate (floor, wall or ceiling)

STAUFF Group	Diameter Range		Dimensions (mm/in)							
	Ø D1	(mm)	(in)	L1	L2	L3	H	D2	B	S
7	5,5 ... 7	5,5 ... 7	.2228	26	14	31,5	5	6,6	16	2
				1.02	.55	1.24	.20	.26	.63	.08
9	7 ... 9	7 ... 9	.2835	28	16	34,5	6	6,6	16	2
				1.10	.63	1.36	.24	.26	.63	.08
13	9,5 ... 13	9,5 ... 13	.3951	30	18	38,5	9	6,6	20	2
				1.18	.71	1.52	.35	.26	.79	.08
15,5	13 ... 15,5	13 ... 15,5	.5161	32	20	41,75	12	6,6	20	2
				1.26	.79	1.64	.47	.26	.79	.08
19	15,5 ... 19	15,5 ... 19	.6175	34	22	45,5	15	6,6	20	2
				1.34	.87	1.79	.59	.26	.79	.08
23	20 ... 23	20 ... 23	.7991	43	28	57,5	19	9	25	3
				1.69	1.10	2.26	.75	.35	.98	.12
26	23 ... 26	23 ... 26	.91 ... 1.02	44	29	60	22	9	25	3
				1.73	1.14	2.36	.87	.35	.98	.12
28,5	26 ... 28,5	26 ... 28,5	1.02 ... 1.12	47	32	64,25	24	9	25	3
				1.85	1.26	2.53	.94	.35	.98	.12
31	28,5 ... 31	28,5 ... 31	1.12 ... 1.22	47	32	65,5	27	9	25	3
				1.85	1.26	2.58	1.06	.35	.98	.12
33 *	31 ... 33	31 ... 33	1.22 ... 1.30	56	36	75,5	29	9	25	3
				2.20	1.42	2.97	1.14	.35	.98	.12
36	33 ... 36	33 ... 36	1.30 ... 1.42	57	40	78	32	11	30	3
				2.24	1.57	3.07	1.26	.43	1.18	.12
39	36 ... 39	36 ... 39	1.42 ... 1.54	59	42	81,5	34	11	30	3
				2.32	1.65	3.21	1.34	.43	1.18	.12
43	39 ... 43	39 ... 43	1.54 ... 1.69	61	44	85,5	38	11	30	3
				2.40	1.73	3.37	1.50	.43	1.18	.12
46	43 ... 46	43 ... 46	1.69 ... 1.81	62	45	88	41	11	30	3
				2.44	1.77	3.46	1.61	.43	1.18	.12
49	46 ... 49	46 ... 49	1.81 ... 1.93	67	48	95,5	44	14	40	4
				2.64	1.89	3.76	1.73	.55	1.57	.16
52 *	49 ... 52	49 ... 52	1.93 ... 2.05	72	53	102	47	14	40	4
				2.83	2.09	4.02	1.85	.55	1.57	.16
58	53 ... 58	53 ... 58	2.09 ... 2.28	76	55	107	52	14	40	4
				2.99	2.17	4.21	2.05	.55	1.57	.16
61	58 ... 61	58 ... 61	2.28 ... 2.40	77	58	111,5	56	14	40	4
				3.03	2.28	4.39	2.20	.55	1.57	.16

* Similar to DIN 1596.

Alternative materials and surface finishings are available upon request. Contact STAUFF for further information.



LubeTeam Hydraulic S.r.l.

Administration and Headquarter:

Via Tufara Scautieri, 6

83018 - San Martino Valle Caudina (AV)

Office and Warehouse:

S.S. 7 Appia, Km. 237,00

82011 - Airola BN

ITALY

Tel. +39 0823 950 994

Fax +39 0823 412 546

www.lubeteam.it info@lubeteam.it

Italian VAT / C.F. e P.IVA: 01251720627

Follow us



This document is the property of LubeTeam Hydraulic S.r.l. All data reported here are for the exclusive use of the Receiver. Reproduction is not authorized without writing permission, in all or in part of the content of this document, in accordance to Law 633 art. 171, dated April 22, 1941.

Il presente documento è di proprietà della LubeTeam Hydraulic S.r.l. I dati riportati sono per esclusivo del destinatario. La riproduzione, di tutto o in parte, non è autorizzata senza permesso scritto secondo l'art. 171 della L. 633 del 22 Aprile 1941.