




Corpo Collare Stauff Profilato (Serie Standard)



 HYDRAULIC
COMPONENTS
& FLUID CONTAMINATION
CONTROL


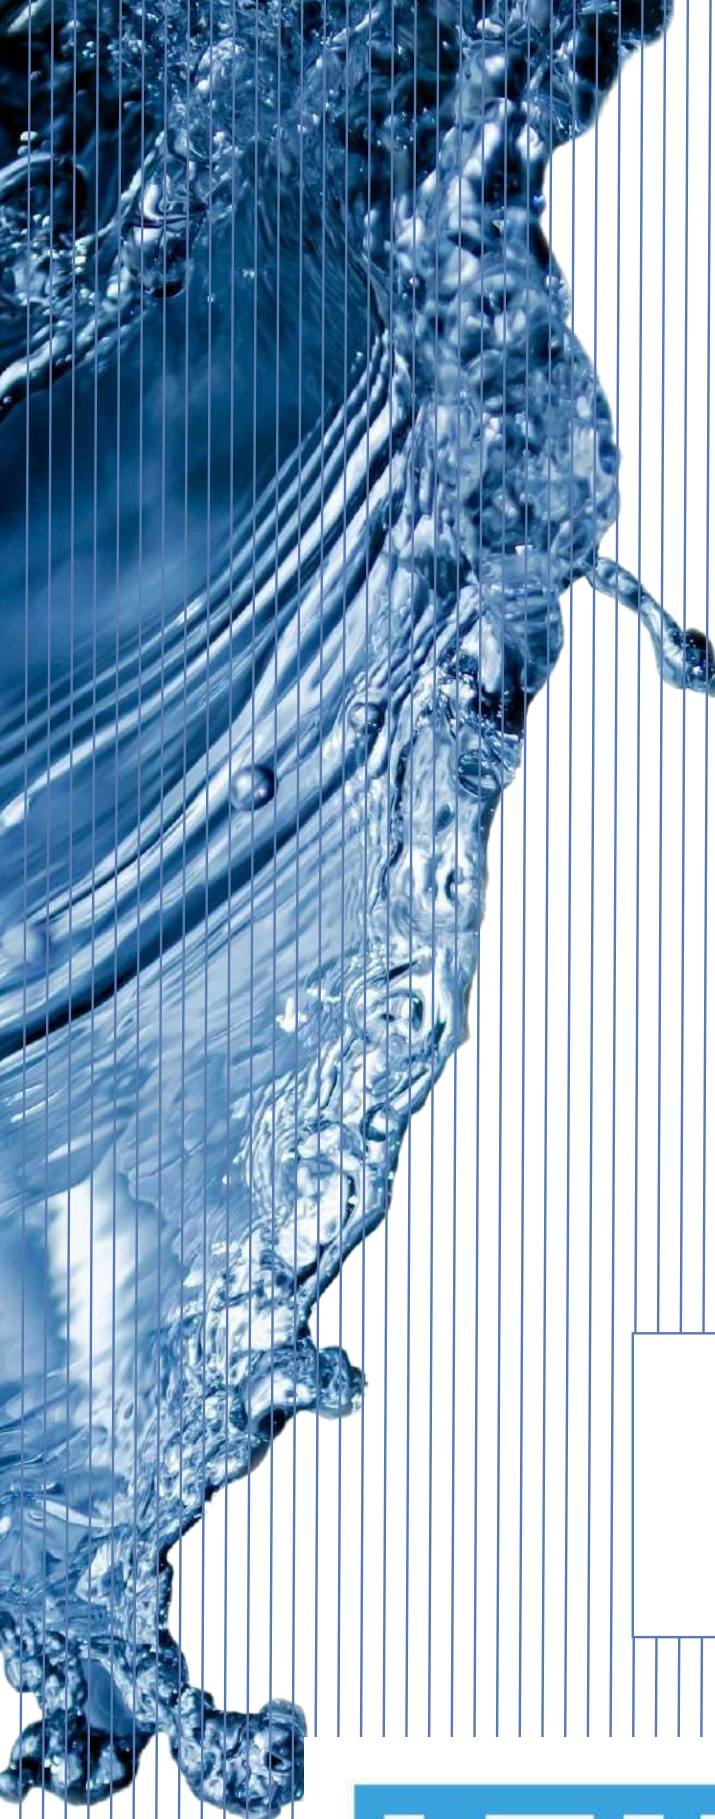


All trademarks belong to their respective owners; third party trademarks, product names, trade names, corporate names and company names mentioned may be trademarks of their respective owners or registered trademarks of other companies and are used for instructional purposes and for the benefit of the owner, without any end of Copyright infringement in force.


Tutti i marchi riportati appartengono ai legittimi proprietari; marchi di terzi, nomi di prodotti, nomi commerciali, nomi corporativi e società citati possono essere di proprietà dei rispettivi titolari o registrati da altre società e sono stati utilizzati a puro scopo esplicativo e a beneficio del possessore, senza alcun fine di violazione dei diritti di Copyright vigenti.

Clamp Body ▪ Profiled Design

Profiled Inside Surface with Tension Clearance



STAUFF Group 1



STAUFF Group 1A to 8

Ordering Codes

Clamp Body

Clamp Body, STAUFF Group 1A

*1*06-*PP

*1*06A-*PP

One clamp body is consisting of two clamp halves.

- * STAUFF Group
- * Exact outside diameter Ø D1 (mm)
- * Material code (see below)

1
06
PP

Standard Materials



Polypropylene

Colour: Green
Material code: **PP**



Polypropylene

Colour: Black
Material code: **PP-BK**



Polyamide

Colour: Black
Material code: **PA**



Thermoplastic Elastomer (87 Shore-A)

Colour: Black
Material code: **SA**



Aluminium

Colour: Self-Colour
Material code: **AL** (STAUFF Group 1A to 6)

See pages 154 / 155 for material properties and technical information.

Special Materials

Please contact STAUFF for further details on fire-proof clamp body materials, tested and approved according to several international fire-protection standards (such as BS 6853, EN 45545-2, UL 94 and many more).

See pages 156 / 157 for material properties and technical information.

Product Features

- Proven, tested and trusted product in various markets
- Recommended for the safe installation of rigid pipes and tubes
- Available for all commonly used pipe and tube outside diameters
- Environmental protection due to vibration/noise reducing design
- Excellent weathering resistance, even under extreme conditions

Group	STAUFF	DIN	Outside Diameter Pipe / Tube Ø D1		Nominal Bore Pipe (in)	Copper Tube ASTM B88 (in)	Ordering Codes (2 Clamp Halves) (** = Material)	Dimensions (mm/in)				
			(mm)	(in)				L1	L2	H	S min.	Width
1		0	6				106-***					
			6,4	1/4			106.4-***					
			8	5/16			108-***	28	9,5	27	0,4	30
			9,5	3/8		1/4	109.5-***	1.10	.37	1.06	.02	1.18
			10		1/8		110-***					
1A		1	12				112-***					
			6				106A-***					
			6,4	1/4			106.4A-***					
			8	5/16			108A-***	37	20	27	0,4	30
			9,5	3/8		1/4	109.5A-***	1.46	.79	1.06	.02	1.18
2		2	10		1/8		110A-***					
			12				112A-***					
			12,7	1/2		3/8	212.7-***					
			13,5		1/4		213.5-***					
			14				214-***	42	26	33	0,6	30
3		3	15				215-***	1.65	1.02	1.30	.02	1.18
			16	5/8		1/2	216-***					
			17,2		3/8		217.2-***					
			18				218-***					
			19	3/4			319-***					
4		4	20				320-***					
			21,3		1/2		321.3-***	50	33	36	0,6	30
			22	7/8		3/4	322-***	1.97	1.30	1.42	.02	1.18
			25				325-***					
			25,4	1			325.4-***					
5		5	26,9		3/4		426.9-***					
			28				428-***					
			28,6			1	428.6-***	59	40	42	0,6	30
			30				430-***	2.32	1.57	1.65	.02	1.18
			32				432-***					
6		6	32	1-1/4			532-***					
			33,7		1		533.7-***					
			35			1-1/4	535-***	71	52	58	0,8	30
			38	1-1/2			538-***	2.80	2.05	2.28	.03	1.18
			40				540-***					
7		7	41,3		1-1/2		541.3-***					
			42		1-1/4		542-***					
			44,5	1-3/4			644.5-***					
			48,3		1-1/2		648.3-***	86	66	66	0,8	30
			50,8	2			650.8-***	3.39	2.60	2.60	.03	1.18
8		8	54		2		654-***					
			57,2	2-1/4			757.2-***					
			60,3		2		760.3-***					
			63,5	2-1/2			763.5-***	121	94	93	0,8	30
			70	2-3/4			770-***	4.76	3.70	3.66	.03	1.18
			73		2-1/2 (ANSI B 36-10)		773-***					
			76,1	3	2-1/2 (DIN EN 10220)		776.1-***					
			88,9		3		888.9-***	147	120	118	0,8	30
			102	4	3-1/2		8102L-***	5.79	4.72	4.65	.03	1.18

Additional outside diameters are available upon request. Please contact STAUFF for further information.

Dimensional drawings: All dimensions in mm (in).



LubeTeam Hydraulic S.r.l.

Administration and Headquarter:

Via Tufara Scautieri, 6

83018 - San Martino Valle Caudina (AV)

Office and Warehouse:

S.S. 7 Appia, Km. 237,00

82011 - Airola BN

ITALY

Tel. +39 0823 950 994

Fax +39 0823 412 546

www.lubeteam.it info@lubeteam.it

Italian VAT / C.F. e P.IVA: 01251720627

Follow us



This document is the property of LubeTeam Hydraulic S.r.l. All data reported here are for the exclusive use of the Receiver. Reproduction is not authorized without writing permission, in all or in part of the content of this document, in accordance to Law 633 art. 171, dated April 22, 1941.

Il presente documento è di proprietà della LubeTeam Hydraulic S.r.l. I dati riportati sono per esclusivo del destinatario. La riproduzione, di tutto o in parte, non è autorizzata senza permesso scritto secondo l'art. 171 della L. 633 del 22 Aprile 1941.