





Corpo collare doppio per agricoltura Stauff AG



 HYDRAULIC
COMPONENTS
& FLUID CONTAMINATION
CONTROL

Compact Twin Series: Clamp Body Type DS

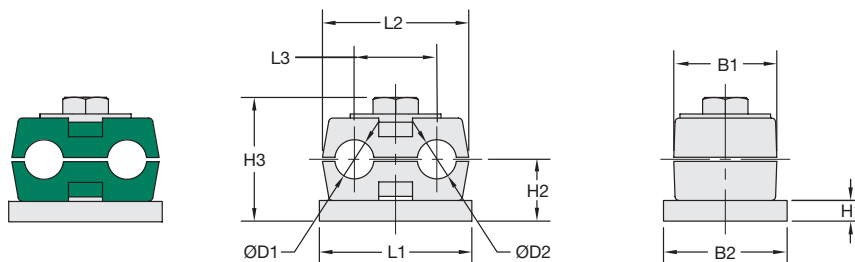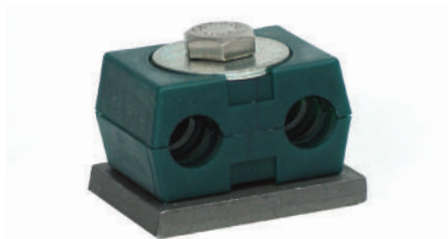

Ordering Codes

Clamp Body ***1-*06/06-*PP-*DS**


One clamp body is consisting of two clamp halves.

* STAUFF Group DS 1	1
* Exact outside diameters Ø D1 / Ø D2 (mm)	06/06
* Clamp Body Material (Polypropylene)	PP
* Compact Twin Series	DS

Group	Outside Diameter Pipe / Tube Ø D1 / Ø D2 (mm) (in)		Nominal Bore Pipe (in)	Copper Tube ASTM B88 (in)	Ordering Codes (2 Clamp Halves)	Dimensions (mm/in)							
STAUFF						L1	L2	L3	H1	H2	H3	B1	B2
DS 1	6				106/06-PP-DS								
	6,4	1/4			106.4/06.4-PP-DS								
	8	5/16			108/08-PP-DS	37	35,5	20	5	15	30	25	30
	9,5	3/8		1/4	109.5/09.5-PP-DS	1.46	1.40	.79	.20	.59	1.18	.98	1.18
	10		1/8		110/110-PP-DS								


Additional outside diameters are available upon request. Please contact STAUFF for further information.

Compact Twin Series: Metal Hardware




Weld Plate, Type SP-DS

SP-DS-1-U-W2
Thread size: 1/4–20 UNC
Carbon Steel, phosphated



Cover Plate, Type US-DS

US-DS-1-W3
Carbon Steel, zinc/nickel-plated






Hexagon Bolt, Type AS

AS-1/4-20UNCx1-W3
Thread size: 1/4–20 UNC
Carbon Steel, zinc/nickel-plated

All threaded parts are only available with unified coarse (UNC) thread. Rail mount and stacking assemblies as well as alternative materials and surface finishings are available upon request.

Agriculture Twin Series: Clamp Body Type AG



Group	Min/Max Outside Diameters Pipe / Tube Radius Grooves (mm) (in)				V-Grooves (mm) (in)	Ordering Codes (1 Clamp Body)	Dimensions (mm/in)							
STAUFF							L1	L2	L3	H1	H2	B1	B2	R
2	3 ... 10	.1239	4 ... 15	.2659		215.8/09.6-PP-AG-BK-HV	57,5	31,7	14,0	16,0	7,1	25,0	11,0	4,8
							2.26	1.25	.55	.63	.24	.98	.43	.19
3	4 ... 25	.1698	7 ... 20	.2879		324.8/19.5-PP-AG-BK-HV	62,0	34,5	14,0	19,0	7,1	32,0	11,0	12,4
							2.48	1.36	.55	.75	.28	1.26	.43	.49

Standard Material



Polypropylene
Colour: Black

See pages 154 / 155 for properties and technical information.

Product Features

- Flip the clamp body to choose between the radius grooved or the v-grooved design (suitable for a range of diameters)
- Use M10 or 3/8–16 UNC bolts or screws (preferably with washers) to fasten clamp bodies directly to the machine
- Clamp bodies can be stacked for multi-level assembly

Additional outside diameters are available upon request. Please contact STAUFF for further information.



LubeTeam Hydraulic S.r.l.

Administration and Headquarter:

Via Tufara Scautieri, 6

83018 - San Martino Valle Caudina (AV)

Office and Warehouse:

S.S. 7 Appia, Km. 237,00

82011 - Airola BN

ITALY

Tel. +39 0823 950 994

Fax +39 0823 412 546

www.lubeteam.it info@lubeteam.it

Italian VAT / C.F. e P.IVA: 01251720627

Follow us



This document is the property of LubeTeam Hydraulic S.r.l. All data reported here are for the exclusive use of the Receiver. Reproduction is not authorized without writing permission, in all or in part of the content of this document, in accordance to Law 633 art. 171, dated April 22, 1941.

Il presente documento è di proprietà della LubeTeam Hydraulic S.r.l. I dati riportati sono per esclusivo del destinatario. La riproduzione, di tutto o in parte, non è autorizzata senza permesso scritto secondo l'art. 171 della L. 633 del 22 Aprile 1941.