






Piastra di copertura Stauff  
DPL

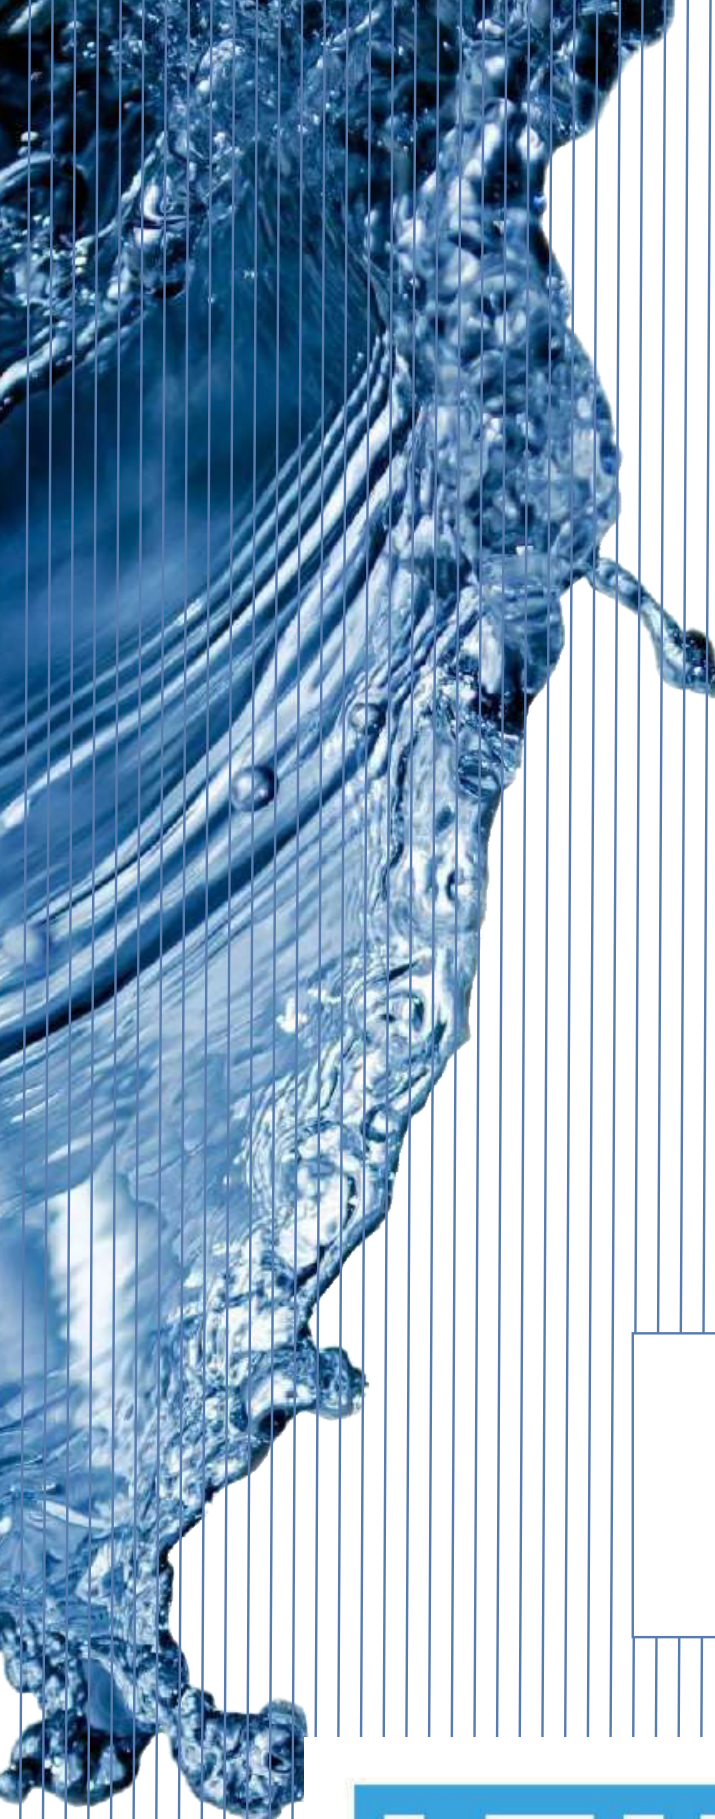

HYDRAULIC  
COMPONENTS  
& FLUID CONTAMINATION  
CONTROL

## Clamp Body ▪ Twin Design Type LNGF / LNUF

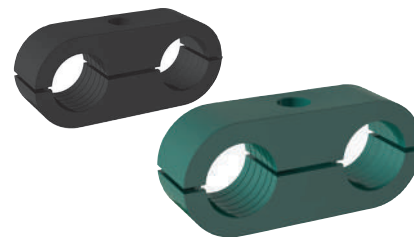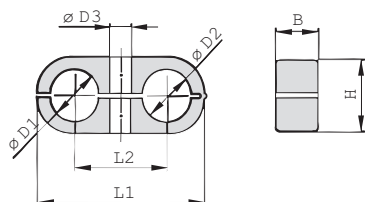

| Group  | Outside Diameters<br>Pipe / Tube / Hose<br>Ø D1 / Ø D2 | Nominal<br>Bore<br>Pipe | Ordering Codes<br>(1 Clamp Body) | Dimensions<br>(mm/in) |      |      |      |      |  |
|--------|--------------------------------------------------------|-------------------------|----------------------------------|-----------------------|------|------|------|------|--|
| STAUFF | (mm)                                                   | (in)                    | (** = Material)                  | L1                    | L2   | B    | H    | Ø D3 |  |
| 1      | 6                                                      |                         | LNGF-106/06-**-                  | 32                    | 18   | 14,5 | 13,5 | 6,8  |  |
|        | 6,4                                                    | 1/4                     | LNGF-106.4/06.4-**-              | 1.26                  | .70  | .57  | .53  | .27  |  |
|        | 8                                                      |                         | LNGF-108/08-**-                  |                       |      |      |      |      |  |
| 2      | 8                                                      |                         | LNGF-208/08-**-                  |                       |      |      |      |      |  |
|        | 9,5                                                    | 3/8                     | LNGF-209.5/09.5-**-              | 41                    | 22   | 14,5 | 18,5 | 6,8  |  |
|        | 10                                                     |                         | LNGF-210/10-**-                  | 1.61                  | .86  | .57  | .73  | .27  |  |
|        | 12                                                     |                         | LNGF-212/12-**-                  |                       |      |      |      |      |  |
|        | 12,7                                                   | 1/2                     | LNGF-212.7/12.7-**-              |                       |      |      |      |      |  |
| 3      | 10                                                     | 1/8                     | LNGF-310/10-**-                  |                       |      |      |      |      |  |
|        | 12                                                     |                         | LNGF-312/12-**-                  |                       |      |      |      |      |  |
|        | 12,7                                                   | 1/2                     | LNGF-312.7/12.7-**-              |                       |      |      |      |      |  |
|        | 13,5                                                   | 1/4                     | LNGF-313.5/13.5-**-              | 54                    | 30   | 14,5 | 23,5 | 6,8  |  |
|        | 14                                                     |                         | LNGF-314/14-**-                  | 2.13                  | 1.18 | .57  | .93  | .27  |  |
|        | 15                                                     |                         | LNGF-315/15-**-                  |                       |      |      |      |      |  |
|        | 16                                                     | 5/8                     | LNGF-316/16-**-                  |                       |      |      |      |      |  |
| 4      | 14                                                     |                         | LNGF-414/14-**-                  |                       |      |      |      |      |  |
|        | 15                                                     |                         | LNGF-415/15-**-                  |                       |      |      |      |      |  |
|        | 16                                                     | 5/8                     | LNGF-416/16-**-                  |                       |      |      |      |      |  |
|        | 17,2                                                   | 3/8                     | LNGF-417.2/17.2-**-              | 70                    | 38   | 14,5 | 30,5 | 6,8  |  |
|        | 18                                                     |                         | LNGF-418/18-**-                  | 2.76                  | 1.50 | .57  | 1.20 | .27  |  |
|        | 19                                                     | 3/4                     | LNGF-419/19-**-                  |                       |      |      |      |      |  |
|        | 20                                                     |                         | LNGF-420/20-**-                  |                       |      |      |      |      |  |
|        | 21,3                                                   | 1/2                     | LNGF-421.3/21.3-**-              |                       |      |      |      |      |  |
|        | 22                                                     |                         | LNGF-422/22-**-                  |                       |      |      |      |      |  |

Additional outside diameters and combinations of different outside diameters (Clamp Body, type LNUF) are available upon request. Please contact STAUFF for further information.

### Ordering Codes

Clamp Body \*LNGF-\*1\*06/06-\*PP

\* Light Series: Clamp Body / Twin Design with identical diameters LNGF  
Clamp Body / Twin Design with different diameters LNUF  
\* STAUFF Group 1  
\* Exact outside diameters Ø D1 / Ø D2 (mm) 06/06  
\* Material code (see below) PP

### Standard Materials

Polypropylene  
Colour: Green  
Material code: PP

Polyamide  
Colour: Black  
Material code: PA

See pages 154 / 155 for material properties and technical information. Alternative materials are available upon request. Please contact STAUFF for further information.

### Applications

▪ Pneumatics, Instrumentation and Automotive Technology, Machine Tool Industry, Lubrication, Mechanical Engineering

## Cover Plate Type DPL



| Group  | Dimensions (mm/in) |      | Ordering Codes<br>(Standard Options) |
|--------|--------------------|------|--------------------------------------|
| STAUFF | L4                 | B2   | Ø D4                                 |
| 1      | 29,5               | 15,5 | 6,8                                  |
|        | 1.16               | .61  | .27                                  |
| 2      | 40                 | 15,5 | 6,8                                  |
|        | 1.57               | .61  | .27                                  |
| 3      | 51                 | 16   | 6,8                                  |
|        | 2.01               | .63  | .27                                  |
| 4      | 63,5               | 16   | 6,8                                  |
|        | 2.50               | .63  | .27                                  |

### Ordering Codes

Cover Plate \*DPL-\*1-\*W3

\* Cover Plate for Clamp Body / Twin Design DPL  
\* STAUFF Group 1  
\* Material code Carbon Steel, zinc/nickel-plated W3

Alternative materials and surface finishings are available upon request. Contact STAUFF for further information. Please note: The maximum tightening torque for bolts is 2,5 N·m (1.85 ft·lb).



## LubeTeam Hydraulic S.r.l.

*Administration and Headquarter:*

Via Tufara Scautieri, 6

83018 - San Martino Valle Caudina (AV)

*Office and Warehouse:*

S.S. 7 Appia, Km. 237,00

82011 - Airola BN

ITALY

Tel. +39 0823 950 994

Fax +39 0823 412 546

[www.lubeteam.it](http://www.lubeteam.it) [info@lubeteam.it](mailto:info@lubeteam.it)

Italian VAT / C.F. e P.IVA: 01251720627

Follow us



This document is the property of LubeTeam Hydraulic S.r.l. All data reported here are for the exclusive use of the Receiver. Reproduction is not authorized without writing permission, in all or in part of the content of this document, in accordance to Law 633 art. 171, dated April 22, 1941.

Il presente documento è di proprietà della LubeTeam Hydraulic S.r.l. I dati riportati sono per esclusivo del destinatario. La riproduzione, di tutto o in parte, non è autorizzata senza permesso scritto secondo l'art. 171 della L. 633 del 22 Aprile 1941.