




OLEOTECNICA
CONTROFLANGE
FILETTATE “UN” CON
FILETTO CILINDRICO
CON SEDE O-RING



HYDRAULIC
COMPONENTS
& FLUID CONTAMINATION
CONTROL

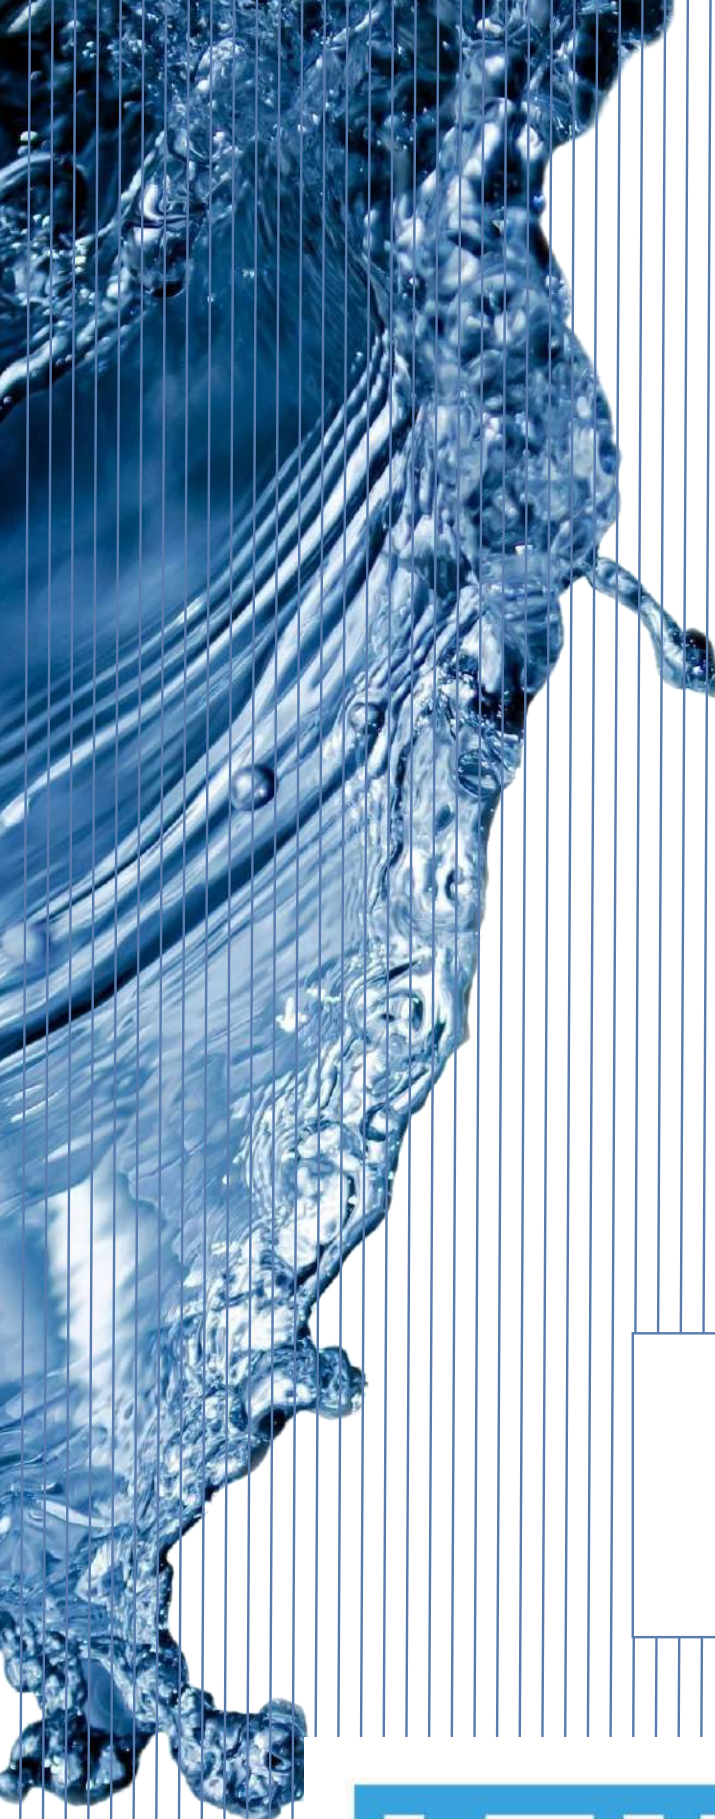

Technical drawing of a mechanical part, showing three views: a side view, a top view, and a circular detail view.

Side View Dimensions:

- G : Total length of the part.
- H : Length of the upper cylindrical section.
- A : Height of the upper cylindrical section.
- B : Height of the lower cylindrical section.
- I : Length of the lower cylindrical section.

Top View Dimensions:

- D : Outer diameter of the flange.
- C : Diameter of the central hole.
- E : Diameter of the inner hole.
- F : Diameter of the mounting holes.
- M : Thickness of the flange.

Circular Detail View Dimensions:

- U : Horizontal distance from the center to the edge of the detail.
- K : Vertical distance from the center to the edge of the detail.
- 15° : Angle of the upper chamfer.
- 45° : Angle of the lower chamfer.

Pressione max di esercizio raccomandata Kg/cm²	Grandezza	Tipo	Dimensioni													Peso Kg
Maximum recommended working pressure Kg/cm²	Size	Type	Dimensions													Weight Kg
			A	B	C	D	E	F	G	H	I	U	K	M		
SERIE 3000																
														Metric	Unc	
345	1/2"	GFS080T	3/4" - 16UNF	13	38,10	57	17,48	46	36	16	17	20,6	2,5	M8	5/16"	0,26
345	3/4"	GFS100T	1"1/16 - 12UN	19	47,63	65	22,23	50	36	18	23	29,2	3,3	M10	3/8"	0,41
345	1"	GFS102T	1"5/16 - 12UN	25	52,37	70	26,19	55	38	18	23	35,5	3,3	M10	3/8"	0,49
276	1"1/4	GFS104T	1"5/8 - 12UN	32	58,72	79	30,18	68	41	21	23	43,5	3,3	M10	7/16"	0,71
207	1"1/2	GFS106T	1"7/8 - 12UN	38	69,85	93	35,71	78	45	25	23	49,8	3,3	M12	1/2"	1,12
SERIE 6000																
414	1/2"	GFS401T	3/4" - 16UNF	13	40,49	57	18,24	46	36	16	17	20,6	2,5	M8	5/16"	0,26
414	3/4"	GFS402T	1"1/16 - 12UN	19	50,80	71	23,80	55	35	21	23	29,2	3,3	M10	3/8"	0,55
414	1"	GFS403T	1"5/16 - 12UN	25	57,15	81	27,76	65	42	25	23	35,5	3,3	M12	7/16"	0,87
414	1"1/4	GFS404T	1"5/8 - 12UN	32	66,68	95	31,75	78	45	27	23	43,5	3,3	M14	1/2"	1,21
414	1"1/2	GFS405T	1"7/8 - 12UN	38	79,38	112	36,50	94	50	30	23	49,8	3,3	M16	5/8"	1,88

DESIGNAZIONE PER ORDINE DESIGNATION FOR ORDER	Materiale / Material	
	S355	AISI 316L
Controflangia con fori di fissaggio filettati metrici <i>Counter-flange with metric threaded fixing holes</i>	GFS...T	GFX...T
Controflangia con fori di fissaggio filettati unc <i>Counter-flange with unc threaded fixing holes</i>	GFS...TU	GFX...TU

LubeTeam Hydraulic S.r.l.

Administration and Headquarter:

Via Tufara Scautieri, 6

83018 - San Martino Valle Caudina (AV)

Office and Warehouse:

S.S. 7 Appia, Km. 237,00

82011 - Airola BN

ITALY

Tel. +39 0823 950 994

Fax +39 0823 412 546

www.lubeteam.it info@lubeteam.it

Italian VAT / C.F. e P.IVA: 01251720627

Follow us



This document is the property of LubeTeam Hydraulic S.r.l. All data reported here are for the exclusive use of the Receiver. Reproduction is not authorized without writing permission, in all or in part of the content of this document, in accordance to Law 633 art. 171, dated April 22, 1941.

Il presente documento è di proprietà della LubeTeam Hydraulic S.r.l. I dati riportati sono per esclusivo del destinatario. La riproduzione, di tutto o in parte, non è autorizzata senza permesso scritto secondo l'art. 171 della L. 633 del 22 Aprile 1941.