





OLEOTECNICA
CONTROFLANGE FILETTATE
NPT

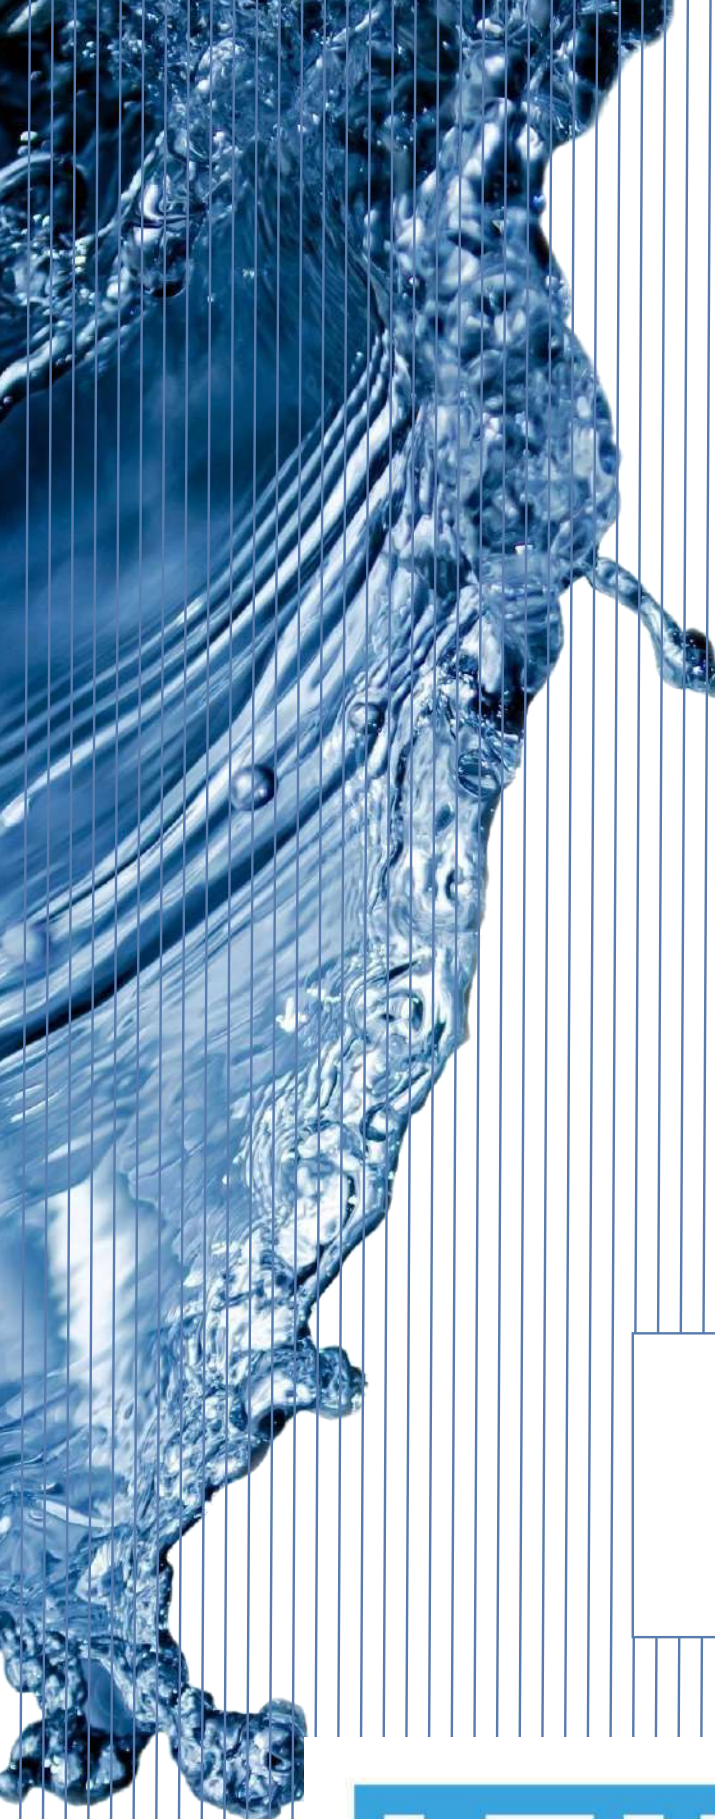

HYDRAULIC
COMPONENTS
& FLUID CONTAMINATION
CONTROL

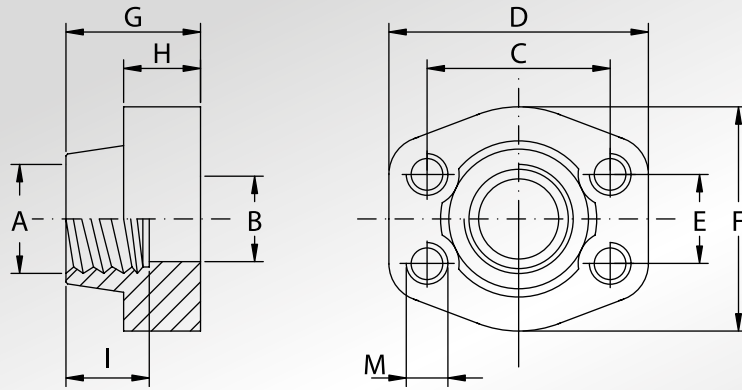

Pressione max di esercizio raccomandata Kg/cm ²	Grandezza	Tipo	Dimensioni											Peso Kg
Maximum recommended working pressure Kg/cm ²	Size	Type	Dimensions											Weight Kg
			A	B	C	D	E	F	G	H	I	M		
SERIE 3000														
												Metric	Unc	
345	1/2"	GFS080N	1/2" NPT	13	38,10	57	17,48	46	36	16	19	M8	5/16"	0,26
345	1/2"	GFS080N038	3/8" NPT	13	38,10	57	17,48	46	36	16	19	M8	5/16"	0,28
345	3/4"	GFS100N	3/4" NPT	19	47,63	65	22,23	50	36	18	19	M10	3/8"	0,41
345	3/4"	GFS100N012	1/2" NPT	13	47,63	65	22,23	50	36	18	19	M10	3/8"	0,44
345	1"	GFS102N	1" NPT	25	52,37	70	26,19	55	38	18	22	M10	3/8"	0,49
345	1"	GFS102N034	3/4" NPT	19	52,37	70	26,19	55	35	21	19	M10	3/8"	0,55
276	1 1/4"	GFS104N	1 1/4" NPT	32	58,72	79	30,18	68	41	21	22	M10	7/16"	0,71
276	1 1/4"	GFS104N100	1" NPT	25	58,72	81	30,18	65	42	25	22	M10	7/16"	0,85
207	1 1/2"	GFS106N	1 1/2" NPT	38	69,85	93	35,71	78	45	25	24	M12	1/2"	1,12
207	1 1/2"	GFS106N114	1 1/4" NPT	32	69,85	95	35,71	78	45	27	22	M12	1/2"	1,24
207	2"	GFS108N	2" NPT	51	77,77	102	42,88	90	45	25	30	M12	1/2"	1,24
207	2"	GFS108N112	1 1/2" NPT	38	77,77	102	42,88	90	45	25	24	M12	1/2"	1,59
172	2 1/2"	GFS110N	2 1/2" NPT	63	88,90	114	50,80	105	50	25	30	M12	1/2"	1,66
138	3"	GFS112N	3" NPT	73	106,38	134	61,93	124	50	27	34	M16	5/8"	2,37
34	3 1/2"	GFS114N	3 1/2" NPT	89	120,65	152	69,85	136	48	27	34	M16	5/8"	2,51
34	4"	GFS116N	4" NPT	99	130,18	162	77,77	146	48	27	34	M16	5/8"	2,87
34	5"	GFS118N	5" NPT	120	152,40	184	92,08	180	50	28	30	M16	5/8"	5,80

SERIE 6000														
414	1/2"	GFS401N012	1/2" NPT	13	40,49	57	18,24	46	36	16	19	M8	5/16"	0,26
414	1/2"	GFS401N038	3/8" NPT	13	40,49	57	18,24	46	36	16	19	M8	5/16"	0,29
414	3/4"	GFS402N	3/4" NPT	19	50,80	71	23,80	55	35	21	22	M10	3/8"	0,55
414	3/4"	GFS402N012	1/2" NPT	13	50,80	71	23,80	55	35	21	19	M10	3/8"	0,60
414	1"	GFS403N	1" NPT	25	57,15	81	27,76	65	42	25	24	M12	7/16"	0,87
414	1"	GFS403N034	3/4" NPT	19	57,15	81	27,76	65	42	25	22	M12	7/16"	0,9
414	1 1/4"	GFS404N	1 1/4" NPT	32	66,68	95	31,75	78	45	27	25	M14	1/2"	1,21
414	1 1/4"	GFS404N100	1" NPT	25	66,68	95	31,75	78	45	27	24	M14	1/2"	1,34
414	1 1/2"	GFS405N	1 1/2" NPT	38	79,38	112	36,50	94	50	30	28	M16	5/8"	1,90
414	1 1/2"	GFS405N114	1 1/4" NPT	32	79,38	112	36,50	94	50	30	25	M16	5/8"	2,03
414	2"	GFS406N	2" NPT	51	96,82	134	44,45	114	65	37	30	M20	3/4"	3,43
414	2"	GFS406N112	1 1/2" NPT	38	96,82	134	44,45	114	65	37	28	M20	3/4"	3,92
414	2 1/2"	GFS507N	2 1/2" NPT	63	123,80	180	58,70	152	80	48	35	M24	7/8"	7,25
414	3"	GFS508N	3" NPT	73	152,40	208	71,40	178	90	58	40	M30	1 1/8"	11,8

DESIGNAZIONE PER ORDINE DESIGNATION FOR ORDER	Materiale / Material	
	S355	AISI 316L
Controflangia con fori di fissaggio filettati metrici Counter-flange with metric threaded fixing holes	GFS...N	GFX...N
Controflangia con fori di fissaggio filettati unc Counter-flange with unc threaded fixing holes	GFS...NU	GFX...NU

LubeTeam Hydraulic S.r.l.

Administration and Headquarter:

Via Tufara Scautieri, 6

83018 - San Martino Valle Caudina (AV)

Office and Warehouse:

S.S. 7 Appia, Km. 237,00

82011 - Airola BN

ITALY

Tel. +39 0823 950 994

Fax +39 0823 412 546

www.lubeteam.it info@lubeteam.it

Italian VAT / C.F. e P.IVA: 01251720627

Follow us



This document is the property of LubeTeam Hydraulic S.r.l. All data reported here are for the exclusive use of the Receiver. Reproduction is not authorized without writing permission, in all or in part of the content of this document, in accordance to Law 633 art. 171, dated April 22, 1941.

Il presente documento è di proprietà della LubeTeam Hydraulic S.r.l. I dati riportati sono per esclusivo del destinatario. La riproduzione, di tutto o in parte, non è autorizzata senza permesso scritto secondo l'art. 171 della L. 633 del 22 Aprile 1941.