
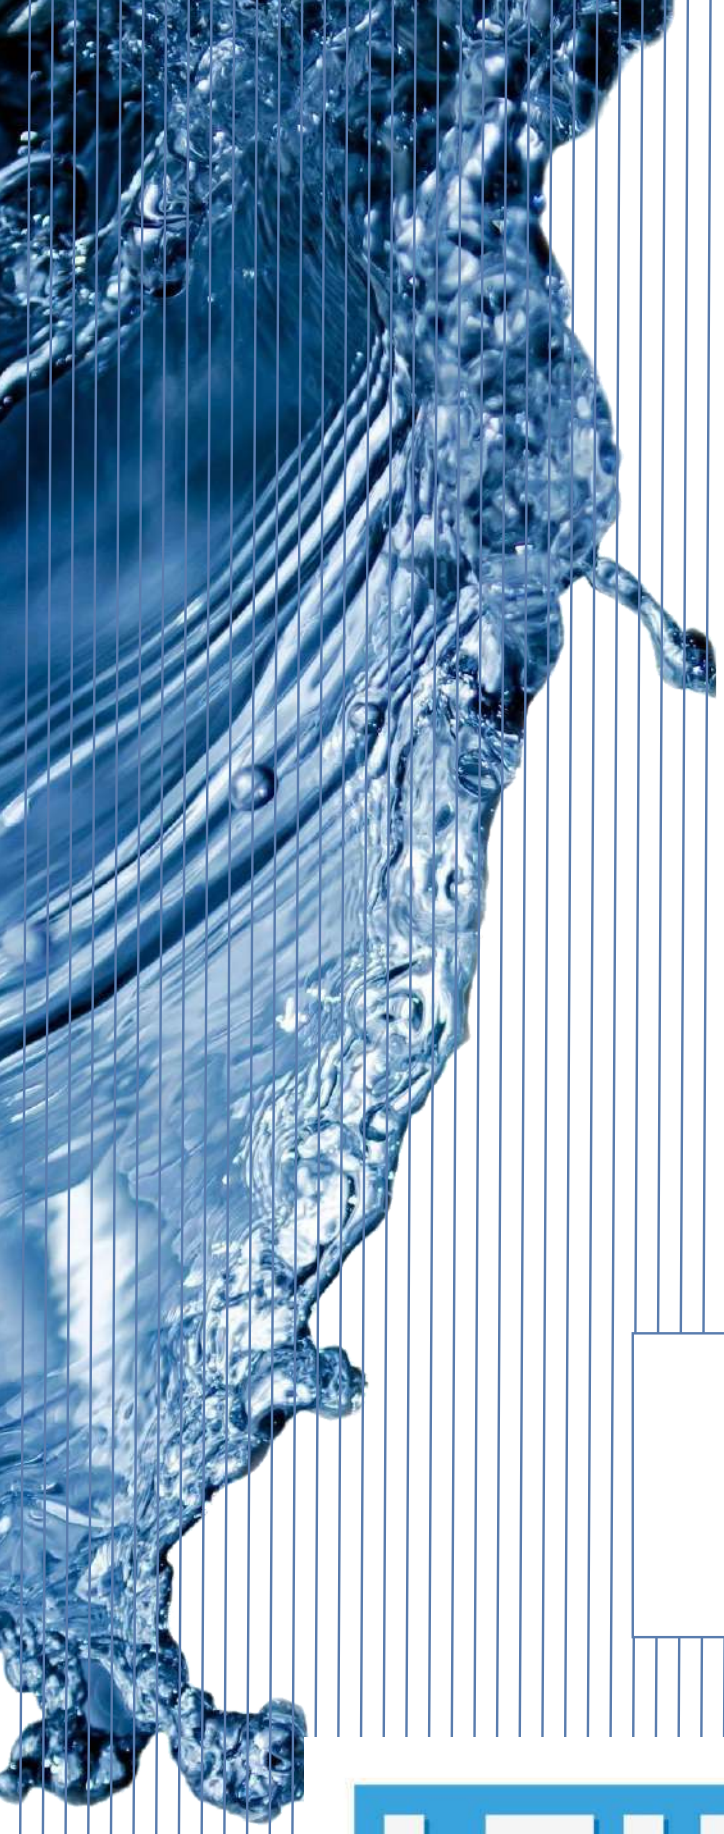


Innesto Elettromagnetico
Borelli 3 daNm
Serie 30900/N1


LTH
HYDRAULIC
COMPONENTS
& FLUID CONTAMINATION
CONTROL

• TAVOLA RICAMBI INNESTO ELETTROMAGNETICO 3daNm
• TABLEAU DES PIECES DETACHEES POUR EMBRAYAGE ELECTROMAGNETIQUE 3 daNm
• SPARE PARTS TABLE FOR ELECTROMAGNETIC COUPLING 3 daNm
• ERSATZEILLISTE FUR ELEKTROMAGNETISCHE SCHALTKUPPLUNGEN 3daNm

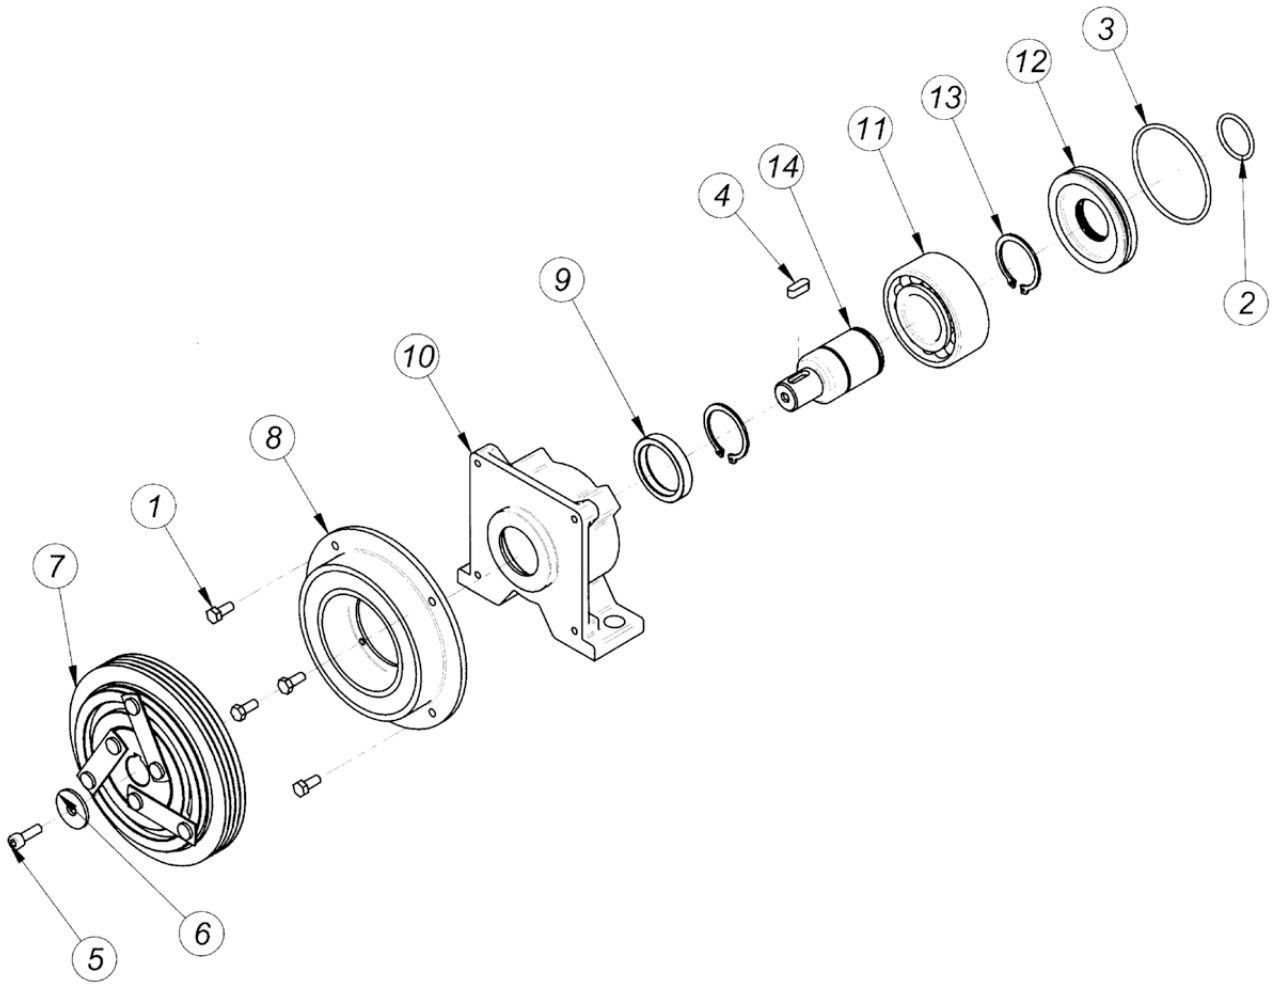

Pos.	CODICE	DENOMINAZIONE	DENOMINATION	DESCRIPTION	BEZEICHNUNG	Q.TA'
1	620512	Vite EN 24017 M5x12	Vis EN 24017 M5x12	Socket EN 24017 M5x12	Befestigungsschraube EN 24017 M5x12	4
2	402100	Anello OR	Bague torique	O-Ring	O-Ring	1
3	403225	Anello OR D.60	Bague torique d.60	O-Ring d.60	O-Ring d.60	1
4	435515	Linguetta UNI 6604 A 5x5x20	Languette UNI 6604 5x5x20	Woudruff key UNI 6604 5x5x20	Halbrundkeil UNI 6604 5x5x20	1
5	610620	VTCEI UNI 5931 M6x12	Vis TCHC UNI 5931 M6x12	Socket capscrew UNI 5931 M6x12	Befestigungsschraube UNI 5931 M6x12	1
6	RSP246	Rosetta UNI 6593 - 6x24x2	Rondelle UNI 6593 - 6x24x2	Washer UNI 6593 - 6x24x2	Rosette UNI 6593 - 6x24x2	1
7	4003/125PLVP	PULEGGIA CINGHIE POLI "V" ELETTROFRIZIONE	POULIE "V" Electro-embrayage	PULLEY "V" Electric clutch	RIEMENSCHEIBE "V" Elektroschaltkpplung	1
8	401203/125B 402403/125B	Bobina	Bobine	Coil	Zundspüle	1
9	303040	Anello di tenuta 30x40x7	Bague d'etancheite 30x40x7	Sealing ring 30x40x7	Dichtring 30x40x7	1
10	30009/3	Scatola	Carcasse	Housing	Gehause	1
11	503206	Cuscinetto SKF 3206	Palier SKF 3206	Bearing SKF 3206	Kugellager SKF 3206	1
12	COP-062	Anello	Bague	Ring	Ring	1
13	903000	Anello elastico UNI 7436 - 25	Circlip UNI 7436 - 25	Snap ring UNI 7436 - 25	Seegerring UNI 7436 - 25	2
14	AC30900	Albero	Arbre	Shaft	Welle	1

SERIE: 30900-1/N1 12 Volt
SERIE: 30900-2/N1 24 Volt

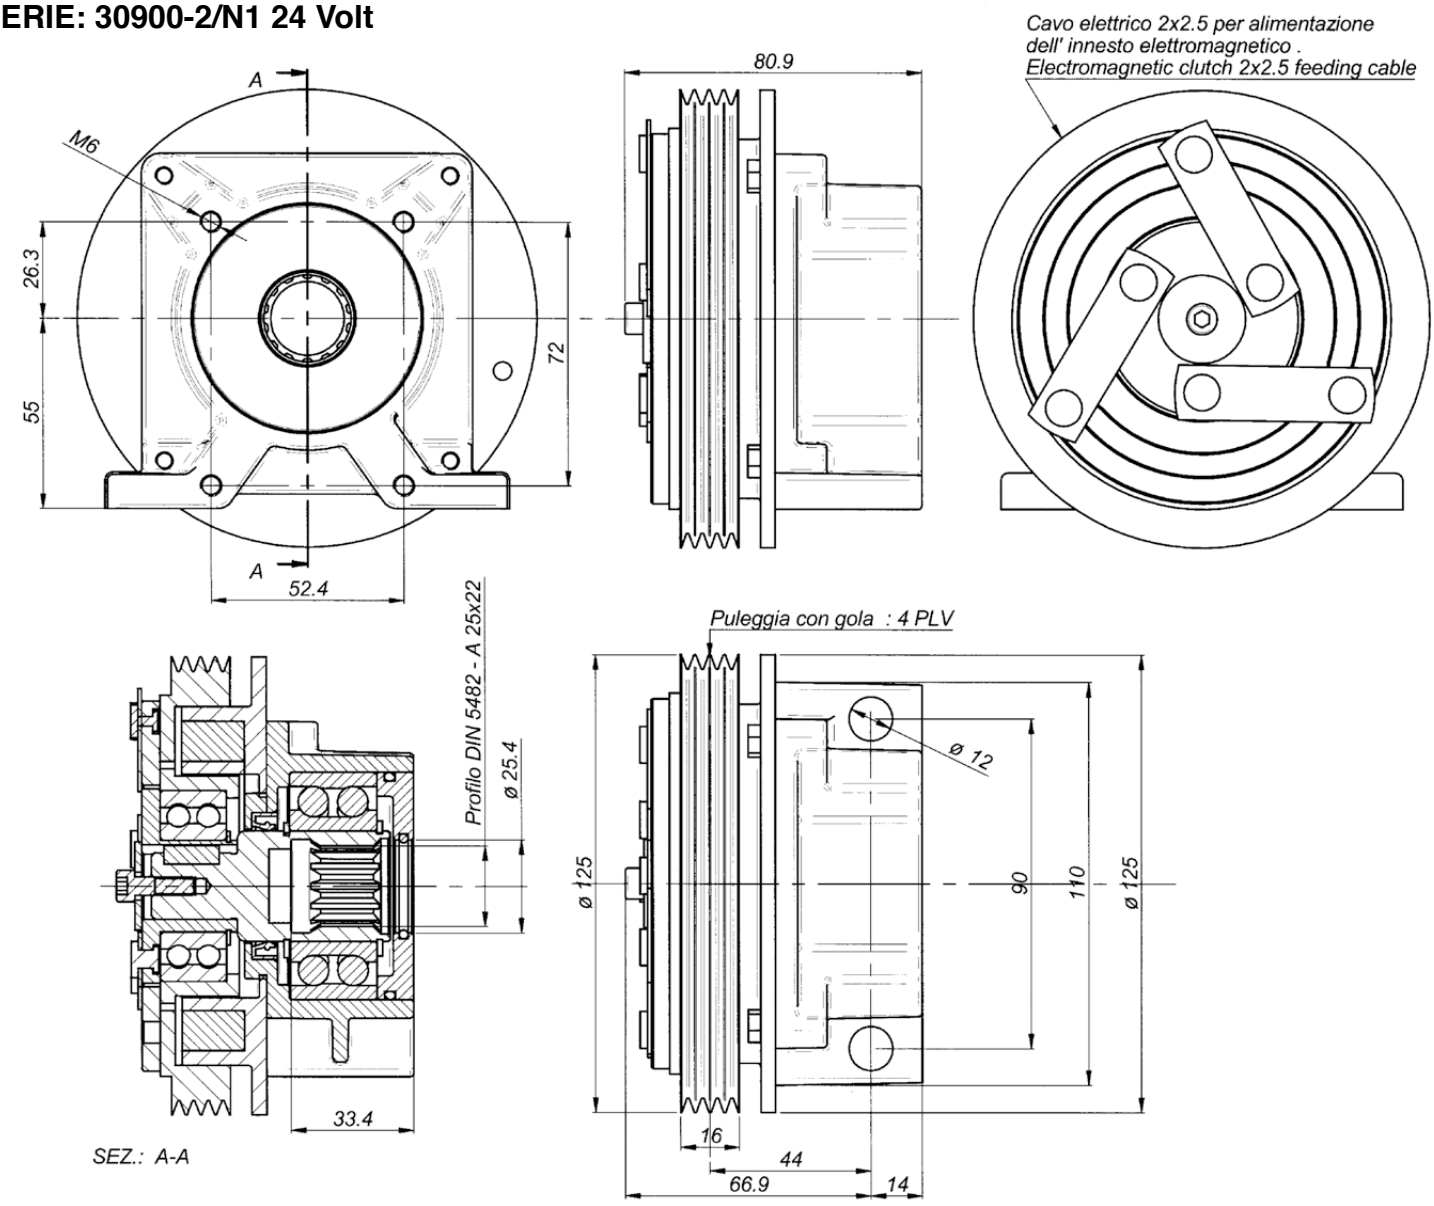

Nominal torque	3,0 daNm		Connection time	25 m/sec
Static torque	4,5 daNm		Disconnection time	40 m/sec
Dynamic torque	3,2 daNm	at 500 rpm	Minimun time between two connection	20 sec
	2,8 daNm	at 1000 rpm		
	1,7 daNm	at 1500 rpm		
	1,4 daNm	at 2000 rpm		
	1,2 daNm	at 2500 rpm	Max speed	5000 rpm
	0,9 daNm	at 3000 rpm	Weight	3 Kg

Electric absorption	Resistance (W)		Current (A)		Power (W)	
	20° C	120° C	20° C	120° C	20° C	120° C
12 V DC	5,7	7,9	2,1	1,6	25,2	18
24 V DC	21,7	30,7	1,1	0,8	26,5	19

All technical data are at 20°C / at 120° C the performance are less 20%
All electromagneteic clutches are reversible.

LubeTeam Hydraulic S.r.l.
Administration and Headquarter:
Via Tufara Scautieri, 6
83018 - San Martino Valle Caudina (AV)
Office and Warehouse:
S.S. 7 Appia, Km. 237,00
82011 - Airola BN
ITALY

Tel. +39 0823 950 994
Fax +39 0823 412 546

www.lubeteam.it info@lubeteam.it

Italian VAT / C.F. e P.IVA: 01251720627

Follow us



This document is the property of LubeTeam Hydraulic S.r.l. All data reported here are for the exclusive use of the Receiver. Reproduction is not authorized without writing permission, in all or in part of the content of this document, in accordance to Law 633 art. 171, dated April 22, 1941.

Il presente documento è di proprietà della LubeTeam Hydraulic S.r.l. I dati riportati sono per esclusivo del destinatario. La riproduzione, di tutto o in parte, non è autorizzata senza permesso scritto secondo l' art. 171 della L. 633 del 22 Aprile 1941.