
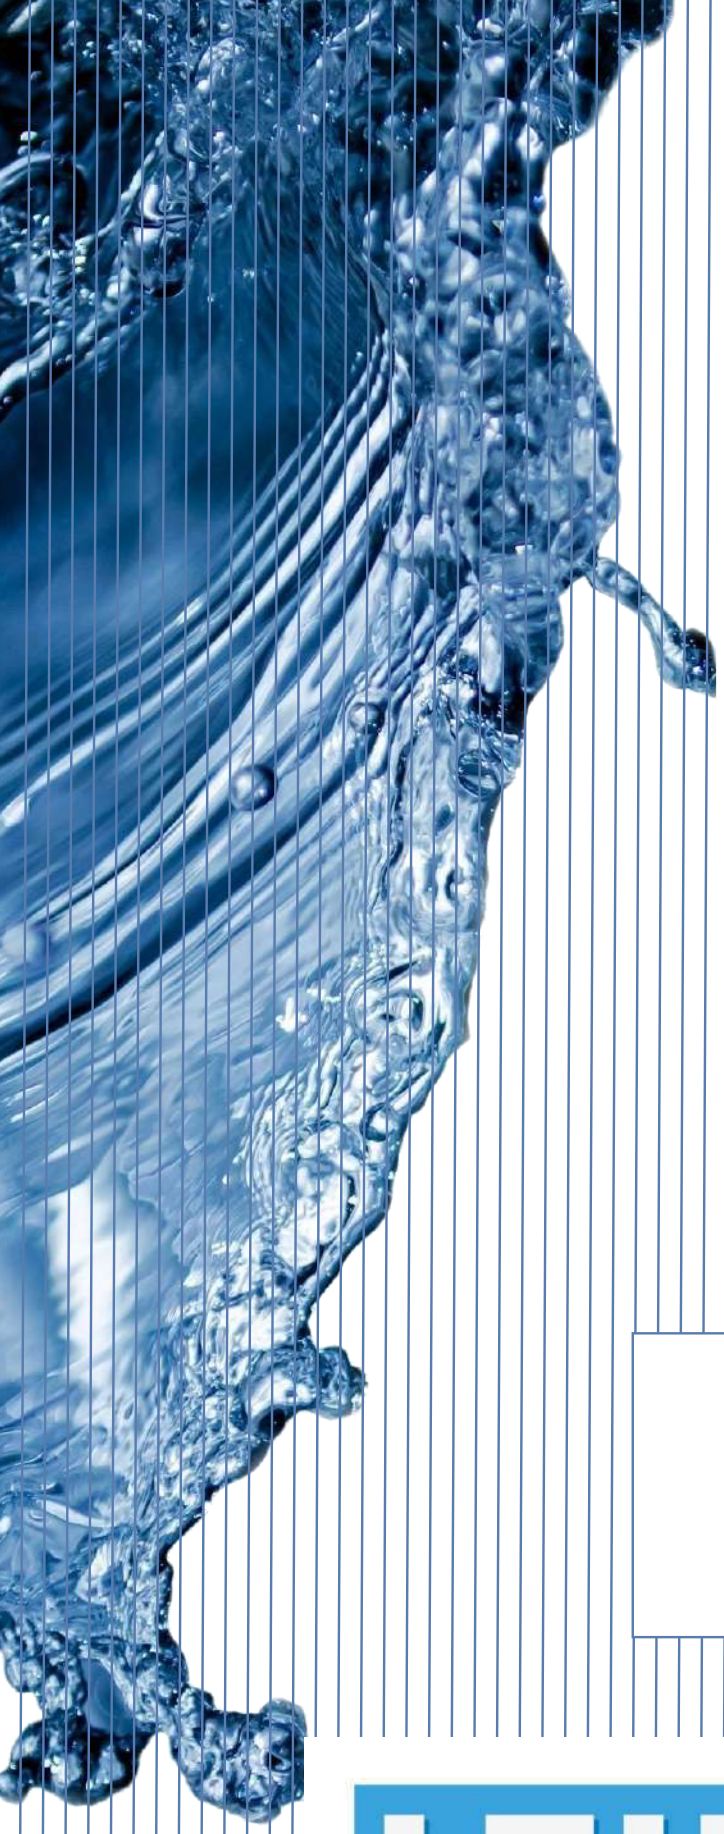


Innesto Elettromagnetico
Borelli 50 daNm
Serie 30940/SF / 30941/SF


LTH
HYDRAULIC
COMPONENTS
& FLUID CONTAMINATION
CONTROL


• TAVOLA RICAMBI INNESTO ELETTROMAGNETICO 50daNm
• *TABLEAU DES PIECES DETACHEES POUR EMBRAYAGE ELECTROMAGNETIQUE 50daNm*
• *SPARE PARTS TABLE FOR ELECTROMAGNETIC COUPLING 50daNm*
• *ERSATZTEILLISTE FUR ELEKTROMAGNETISCHE SCHALTKUPPLUNGEN 50daNm*

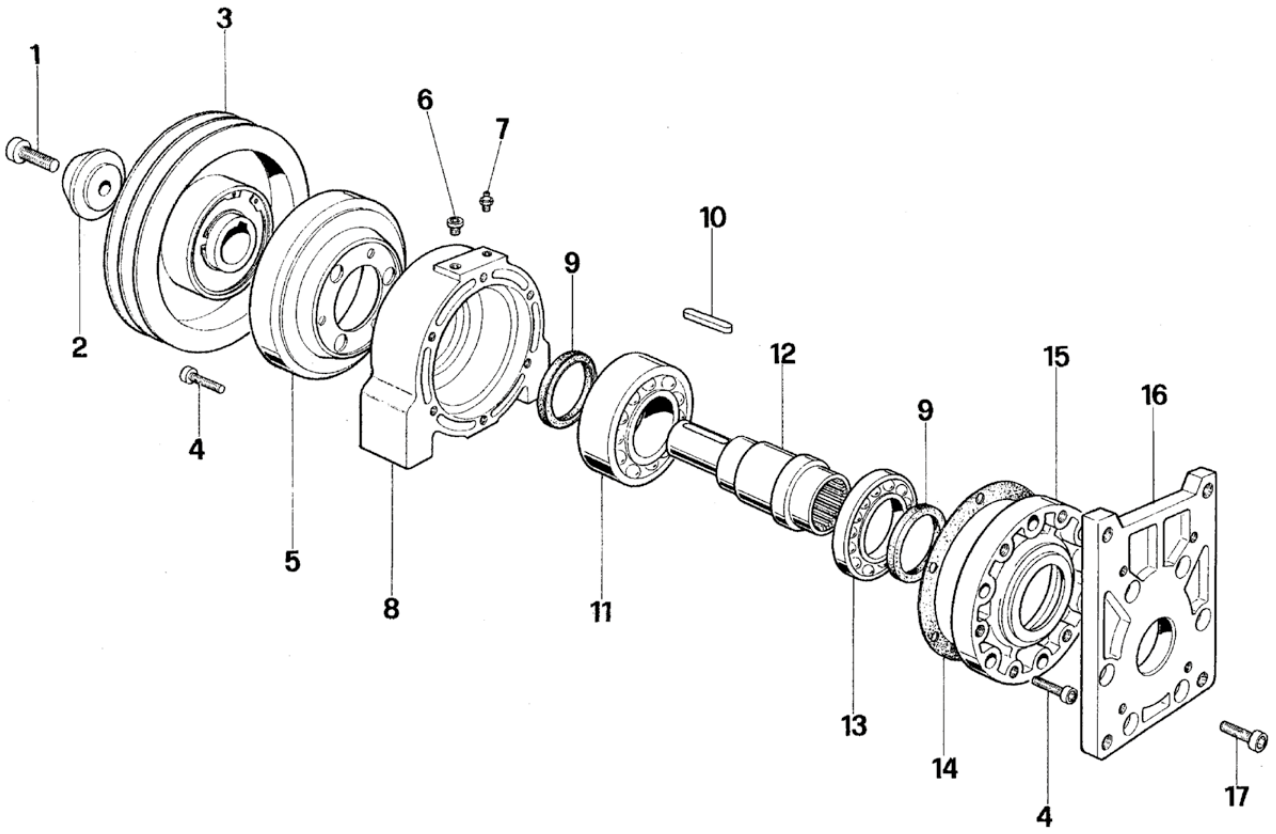


POS.	CODICE	DENOMINAZIONE	DENOMINATION	DESCRIPTION	BEZEICHNUNG	Q.TA'
1	611645	Vite T.C.E.I. M16x45	Vis T.C.H.C. M16x45	Socket capscrew M16x45	Befestigungsschraube UNI 5931 M16x45	1
2	RSP016	Rondella speciale D.16	Special rondelle d.16	Special washer d.16	Rosette d.16	1
3	4050/229BP	Elettrofrizione	Electro-embrayage	Electric clutch	Elektroschaltkupplung	1
4	611020	Vite T.C.E.I. M10x20	Vis T.C.H.C. M10x20	Socket capscrew M10x20	Befestigungsschraube UNI 5931 M10x20	3
5	401250/229B 402450/229B	Bobina	Bobine	Coil	Zundspüle	1
6	940182	Tappo scarico olio 1/8" G	Bouchon vindage huile 1/8"G	Oil drain plug 1/8"G	Olablabschraube 1/8"G	1
7	500000.1	Ingrassatore M8x1.25	Graisseur M8x1.25	Grease nipple M8x1.25	Fettbuchse M8x1.25	1
8	30009.30	Scatola	Carcasse	Housing	Gehuase	1
9	306075	Anello di tenuta 60x75x8	Bague d'etancheite 60x75x8	Sealing ring 60x75x8	Dichtring , durchm. 60x75x8	2
10	421086	Chiavetta 10x8x60 UNI 6604	Clavette 10x8x60 UNI 6604	Key 10x8x60 UNI 6604	Keil 10x8x60 UNI 6604	1
11	503212/Z	Cuscinetto 3212 A	Pallier 3212 A	Bearing 3212 A	Kugellager 3212 A	1
12	Ac30940	Albero	Arbre	Shaft	Welle	1
13	501601/Z	Cuscinetto 16012 A	Pallier 16012 A	Bearing 16012 A	Kugellager 16012 A	1
14	30470.2	Guarnizione	Joint	Gasket	Dichtung	1
15	30470	Flangia circolare	Bride circulaire	Round flange	Runder flansch	1
16	30900.1	Flangia pompa	Bride	Flange	Flansch	1
17	611025	Vite T.C.E.I. M10x25	Vis T.C.H.C. M10x25	Socket capscrew M10x25	Befestigungsschraube UNI 5931 M10x25	6

SERIE: 30940/SF 12 Volt
SERIE: 30941/SF 24 Volt

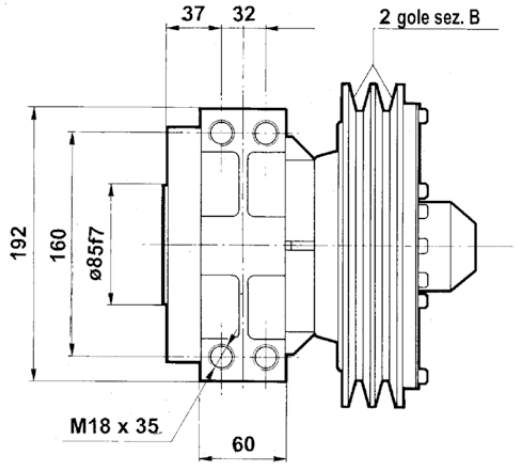

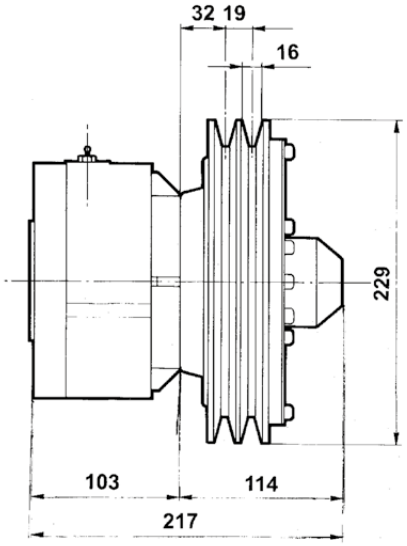

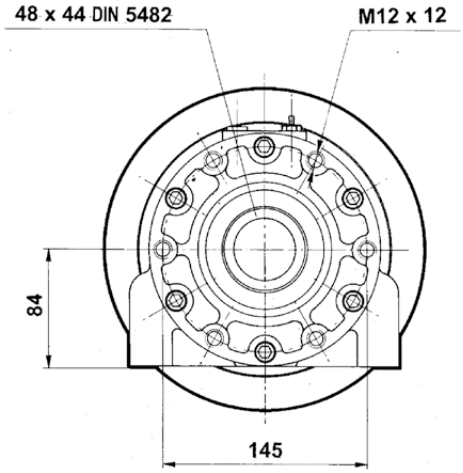


Nominal torque	38,0 daNm		Connection time	25 m/sec
Static torque	50,0 daNm		Disconnection time	40 m/sec
Dynamic torque	33,0 daNm	at 500 rpm	Minimun time between two connection	20 sec
	31,5 daNm	at 1000 rpm		
	28,7 daNm	at 1500 rpm		
	28,0 daNm	at 2000 rpm		
	27,2 daNm	at 2500 rpm	Max speed	5000 rpm
	27,0 daNm	at 3000 rpm	Weight	20 Kg

Electric absorption	Resistance (Ω)		Current (A)		Power (W)	
	20° C	120° C	20° C	120° C	20° C	120° C
12 V DC	1,81	2,60	6,60	4,62	80,00	56,00
24 V DC	7,40	10,50	3,25	2,30	78,00	54,60

All technical data are at 20°C / at 120 °C the performance are less 20%
All electromagneteic clutches are reversible.

• FLANGE PER INNESTI ELETTROMAGNETICI 50 daNm
• BRIDE POUR EMBRAYAGES ELECTROMAGNETIQUE 50 daNm
• FLANGES FOR ELECTROMAGNETIC COUPLING 50 daNm
• FLANSCHE FUR ELEKTROMAGNETISCHE SCHALTKUPPLUNGEN 50 daNm

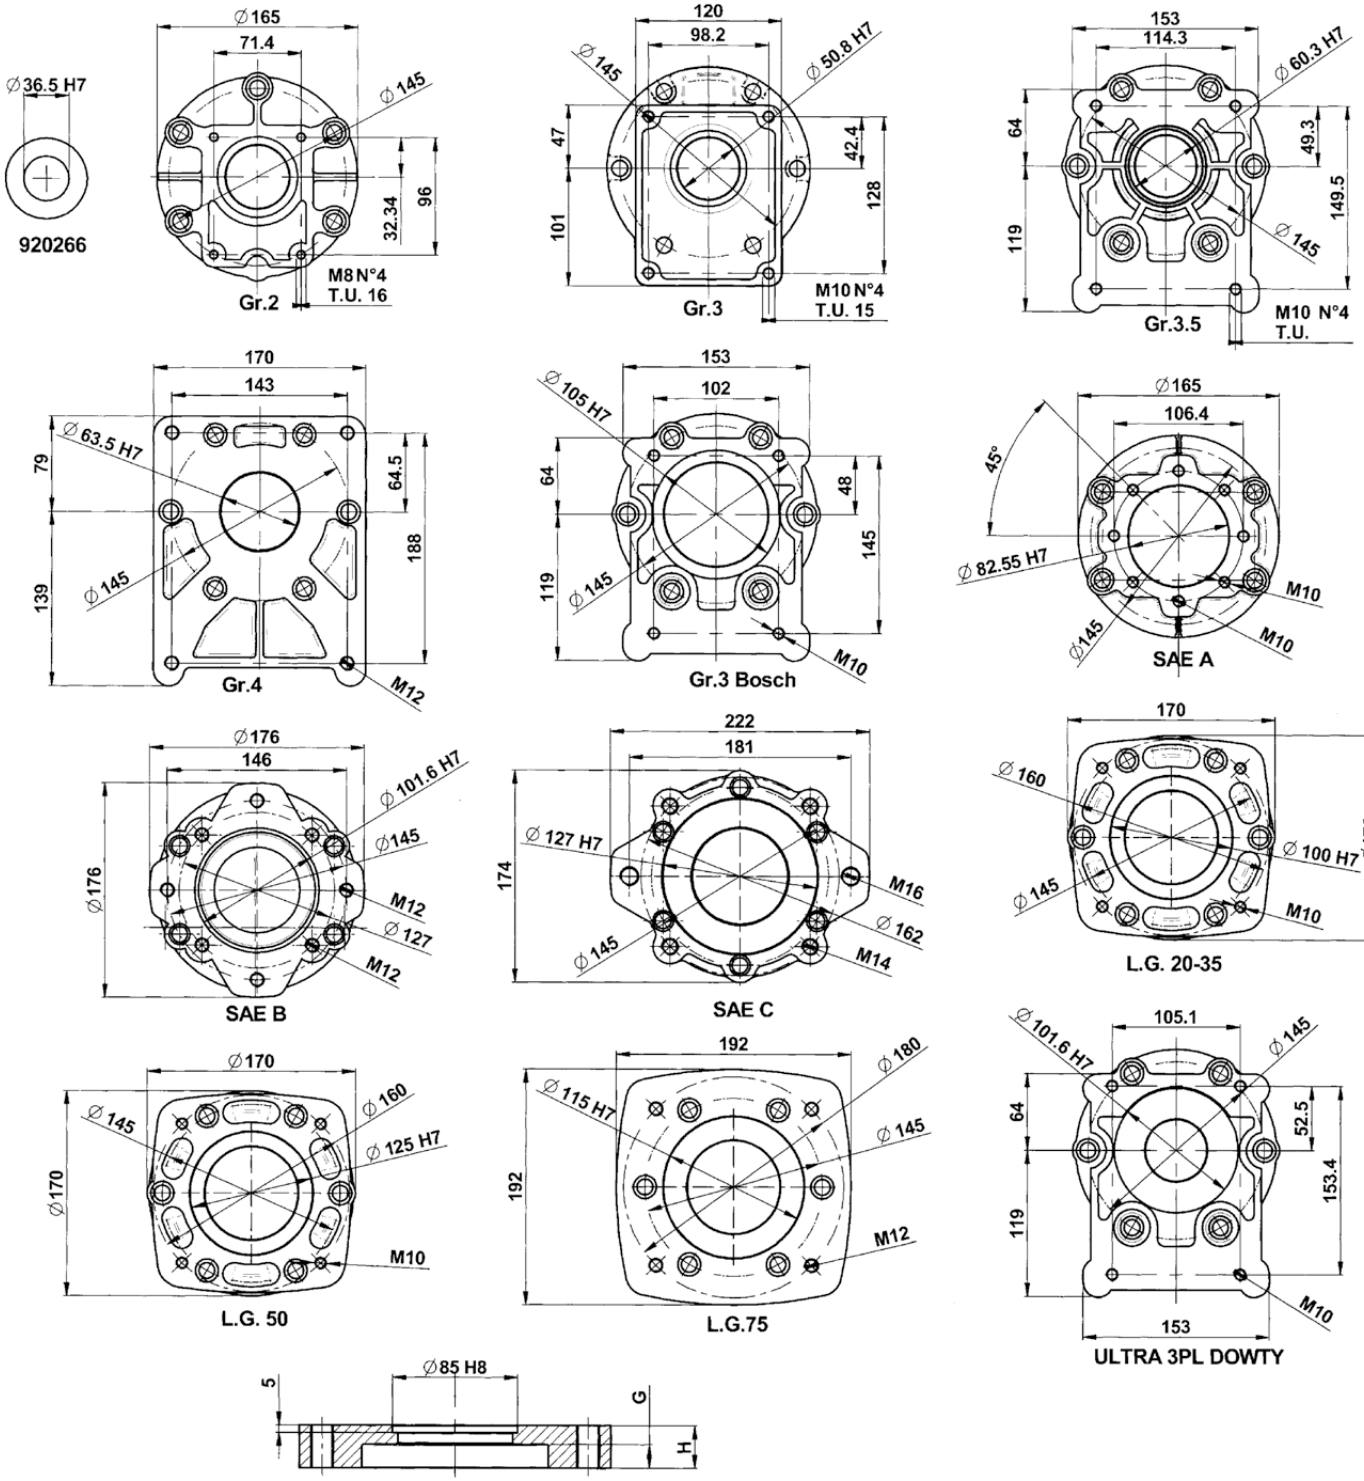

Flangia :Tipo Bride : Type Flange : Type Flanschtype	Gr.2	Gr.3	Gr.3.5	Gr.4	Gr.3 BOSCH	SAE A	SAE B	SAE C	L.G. 20-35	L.G. 50	L.G.75	ULTRA 3PL DOWTY
H	21	23	24	23	19	25	25	28	34	41	41	24.5
G	17	21	11.5	16	12	21	12	16	25	32.5	33	10.5
Codice flangia Code bride Code N. flange Codenummer flanschtype	30400	30401	30402	30403	30417	30420	30422	30432	30461	30462	30463	30471

LubeTeam Hydraulic S.r.l.
Administration and Headquarter:
Via Tufara Scautieri, 6
83018 - San Martino Valle Caudina (AV)
Office and Warehouse:
S.S. 7 Appia, Km. 237,00
82011 - Airola BN
ITALY

Tel. +39 0823 950 994
Fax +39 0823 412 546

www.lubeteam.it info@lubeteam.it

Italian VAT / C.F. e P.IVA: 01251720627

Follow us



This document is the property of LubeTeam Hydraulic S.r.l. All data reported here are for the exclusive use of the Receiver. Reproduction is not authorized without writing permission, in all or in part of the content of this document, in accordance to Law 633 art. 171, dated April 22, 1941.

Il presente documento è di proprietà della LubeTeam Hydraulic S.r.l. I dati riportati sono per esclusivo del destinatario. La riproduzione, di tutto o in parte, non è autorizzata senza permesso scritto secondo l' art. 171 della L. 633 del 22 Aprile 1941.