




UFI FILTERS
CLB

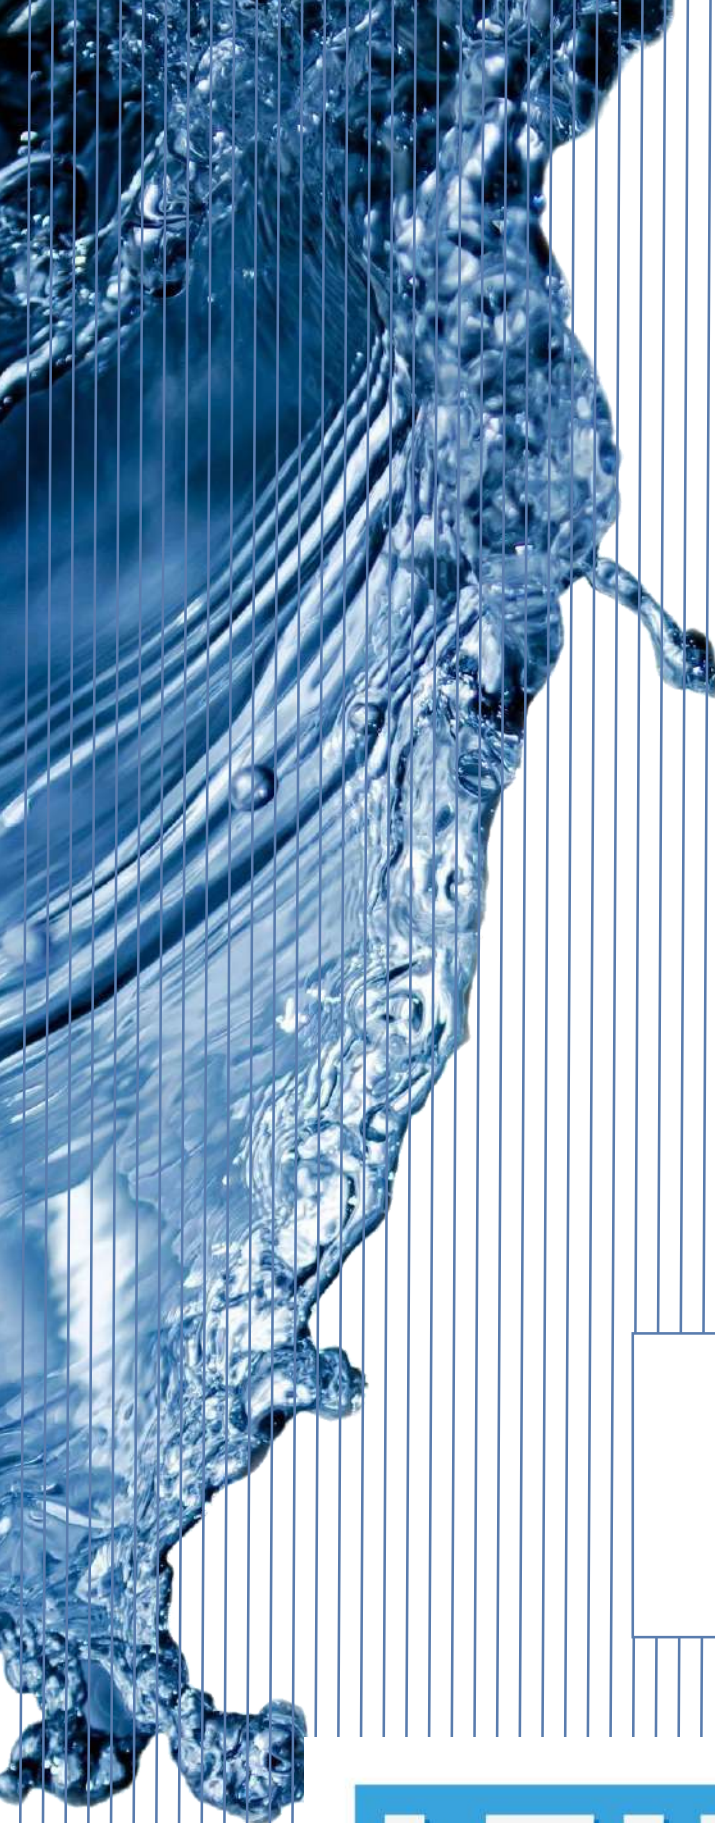

HYDRAULIC
COMPONENTS
& FLUID CONTAMINATION
CONTROL

DESCRIPTION

Float switches

MATERIALS

Tank connection: Anodized aluminum

Rod: Stainless steel

Float: Polyamide

ELECTRICAL DATA

SPDT Reed switch

Max load AC up to 48 V - 0,5 A

Maxload DC up to 48 V - 0,5 A

Connector DIN 43650

Protection DIN 40050: IP 65

HOW IT WORKS

Electrical level indicators, an electrical signal is activated when the minimum (or maximum) oil level is reached. The REED switch has SPDT contacts.

N.B. the float switch must be mounted at min 50 mm from ferrous walls. Max oil viscosity 150 cSt.


WORKING TEMPERATURE

From -10°C to 90°C

COMPATIBILITY

Full with fluids HH-HL-HM-HV-HTG (according to ISO 6743/4).
For fluids different than the above mentioned, please contact our Customer Service.

HYDRAULIC DIAGRAM



Is this datasheet the latest release? Please check on our website.




ORDERING AND OPTION CHART


C	L	B	COMPLETE FILTER FAMILY						
			SIZE & LENGTH	15	20	25	35	40	50
		U	CONNECTION TYPE						
			U = Universal, 1" BSP+ 2 or 3 holes flange	U	U	U	U	U	U
		N	SEALS						
			N = NBR Nitrile	N	N	N	N	N	N
		W	ACCESSORIES						
			W = Without	W	W	W	W	W	W

DIMENSIONS

	L
CLB15UNW LME150B5F	150
CLB20UNW LME200B5F	200
CLB25UNW LME250B5F	250
CLB35UNW LME350B5F	350
CLB40UNW LME400B5F	400
CLB50UNW LME500B5F	500

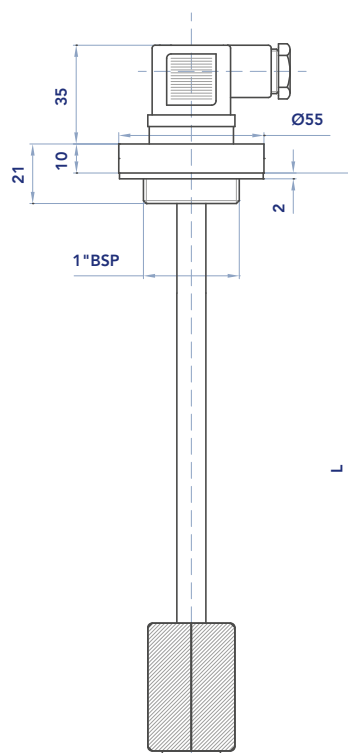

ELECTRICAL DATA




SPDT Reed switch
Max load AC up to 48V-0,5A
Max load DC up to 48V-0,5 A

Connector DIN 43650

Protection DIN 40050: IP65

Tank mounting pattern possibilities:

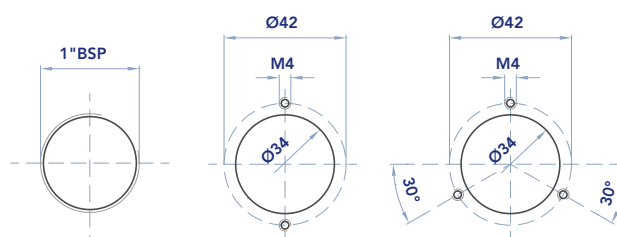

LubeTeam Hydraulic S.r.l.

Administration and Headquarter:

Via Tufara Scautieri, 6

83018 - San Martino Valle Caudina (AV)

Office and Warehouse:

S.S. 7 Appia, Km. 237,00

82011 - Airola BN

ITALY

Tel. +39 0823 950 994

Fax +39 0823 412 546

www.lubeteam.it info@lubeteam.it

Italian VAT / C.F. e P.IVA: 01251720627

Follow us



This document is the property of LubeTeam Hydraulic S.r.l. All data reported here are for the exclusive use of the Receiver. Reproduction is not authorized without writing permission, in all or in part of the content of this document, in accordance to Law 633 art. 171, dated April 22, 1941.

Il presente documento è di proprietà della LubeTeam Hydraulic S.r.l. I dati riportati sono per esclusivo del destinatario. La riproduzione, di tutto o in parte, non è autorizzata senza permesso scritto secondo l'art. 171 della L. 633 del 22 Aprile 1941.