





Collare U-Bolt tondo Stauff
RB/RUL
(con sella in plastica lunga)

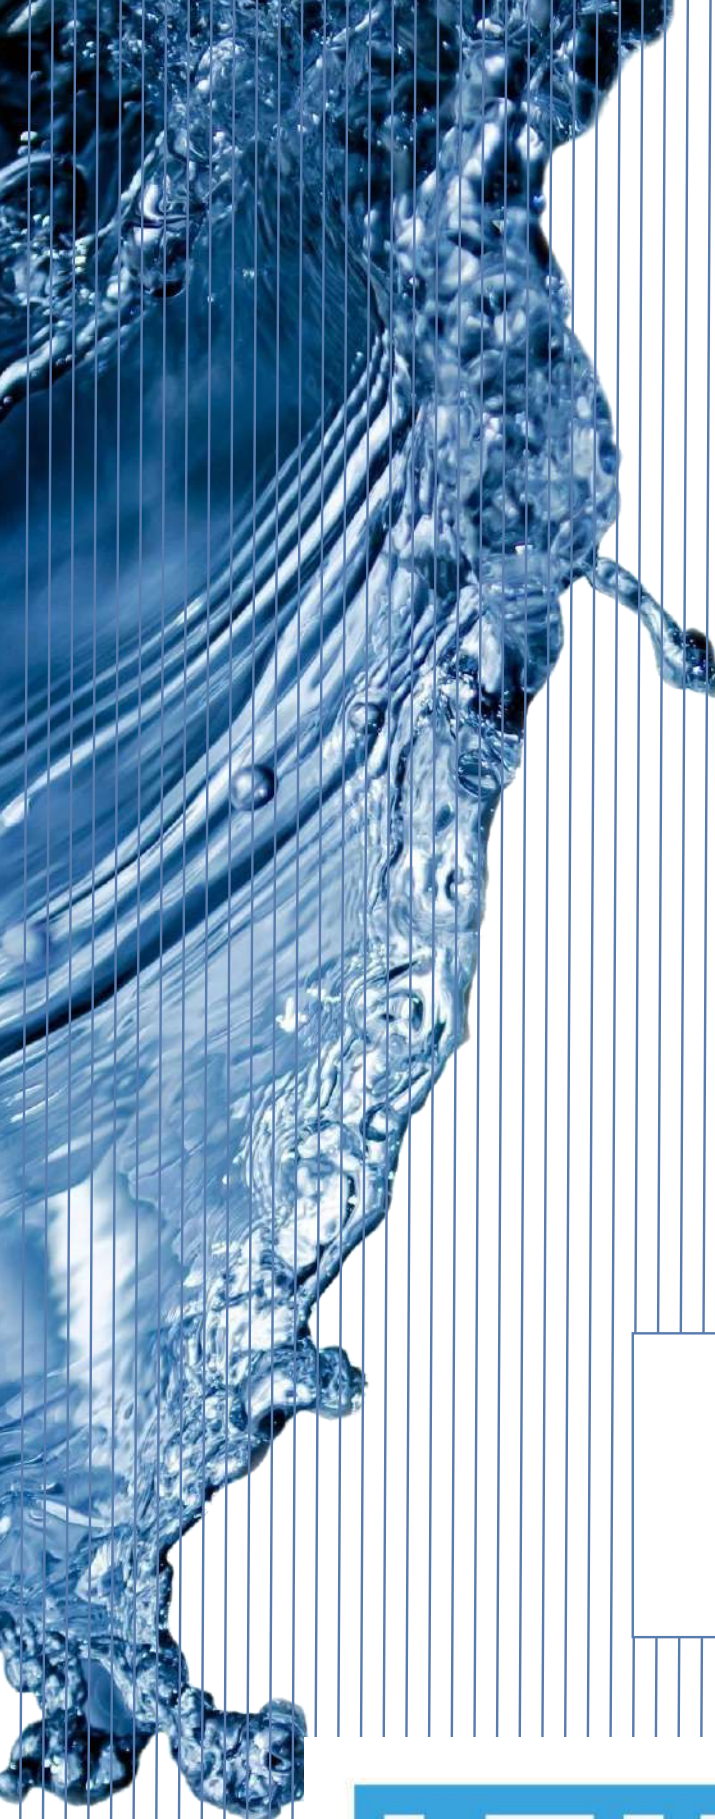


HYDRAULIC
COMPONENTS
& FLUID CONTAMINATION
CONTROL

Round Steel U-Bolt with Plastic Pipe Saddle (Long) Type RB+RUL

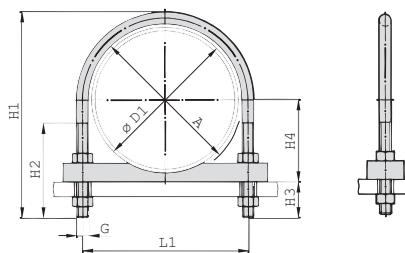

Round Steel U-Bolt (type RB) with Plastic Pipe Saddle (type RUL)



Ordering Codes

Clamp Assembly *RB+RUL-*48.3-*PP-*W1

One clamp assembly is consisting of one Round Steel U-Bolt (type RB), one Plastic Pipe Saddle (type RUL) and four Nuts (to DIN EN ISO 4032).

* Clamp Assembly (as listed above)	RB+RUL
* Exact outside diameter Ø D1 (mm)	48.3
* Material of Pipe Saddle (see below)	PP
* Material code Carbon Steel, uncoated	W1
Carbon Steel, zinc-plated, blue-chromated	W32
Stainless Steel V4A 1.4401 / 1.4571 (AISI 316 / 316 Ti)	W5

Please note: All items are supplied non-assembled.

Standard Materials for Plastic Pipe Saddles

Polypropylene
Colour: Green
Material code: **PP**

Polyamide
Colour: Black
Material code: **PA**

See pages 154 / 155 for material properties and technical information.

Alternative materials are available upon request.
Please contact STAUFF for further information.

Applications


- Standing or hanging installation of pipes and tubes on beams, profiles and consoles
- Design with two threaded ends allows for ideal adaptation to suit the exact outer diameter of the pipe or tube

Diameter Nominal	Outside Diameter Pipe / Tube Ø D1		Nominal Bore Pipe	Dimensions (mm/in)							
DN	(mm)	(in)	(in)	Round Steel U-Bolt (Type RB)							
				A	L1	H1	H2	H3	H4	Thread G	
20	25	.98		30	40	73,5	41	30	17,5	M10	
					1.57	2.89	1.61	1.18	.69		
	26,9	1.06	3/4	1.18	40	73,5	41	30	18,5	M10	
25	30	1.18		38	48	81	48	30	20	M10	
					1.89	3.19	1.89	1.18	.79		
	33,7	1.33	1	1.50	48	81	48	30	22	M10	
32	38	1.50		46	56	89	48	30	24	M10	
					2.20	3.50	1.89	1.18	.94		
	42,4	1.69	1-1/4	1.81	56	89	48	30	26,2	M10	
40	44,5	1.76		52	62	100	55	35	27,2	M10	
					2.44	3.94	2.17	1.38	1.07		
	48,3	1.90	1-1/2	2.05	62	100	55	35	29	M10	
50	57	2.28		64	76	118	63	39	33,5	M12	
					2.99	4.65	2.48	1.54	1.32		
	60,3	2.41	2	2.52	76	118	63	39	35,2	M12	
65	76,1	3.04	2-1/2	82	76	118	63	39	35,2	M12	
					2.99	4.65	2.48	1.54	1.39		
					94	135	77	39	43	M12	
80	88,9	3.56	3	94	3.23	3.70	5.31	3.03	1.54	1.69	M12
					4.17	5.98	3.23	1.54	2.15		
					136	190	105	47	64	M16	
100	108	4.32		120	5.35	7.48	4.13	1.85	2.52	M16	
					5.35	7.48	4.13	1.85	2.64		
	114,3	4.57	4	4.72	136	190	105	47	67	M16	
125	133	5.32		148	5.35	7.48	4.13	1.85	2.64	M16	
					6.46	8.54	4.13	1.85	3.01		
	139,7	5.59	5	5.83	164	217	105	47	80	M16	
150	159	6.36		176	6.46	8.54	4.13	1.85	3.15	M16	
					7.56	9.72	4.13	1.85	3.60		
	168,3	6.73	6	6.93	192	247	105	47	91,5	M16	
175	193,7	7.75		202	7.56	9.72	4.13	1.85	3.78	M16	
					218	273	105	47	109		
					7.96	8.58	10.75	4.13	1.85	4.29	
200	216	8.64		228	248	311	125	55	120	M20	
					9.76	12.24	4.92	2.17	4.72		
	219,1	8.76	8	8.98	248	311	125	55	121,5	M20	
250	267	10.68		282	9.76	12.24	4.92	2.17	4.78	M20	
					303	364	125	55	145,5		
	273	10.92	10	11.10	11.93	14.33	4.92	2.17	5.73	M20	
300	318	12.72		332	11.89	14.33	4.92	2.17	5.85	M20	
					352	418	125	55	174		
	323,9	12.96	12	13.07	13.86	16.46	4.92	2.17	6.85	M20	
350	355,6	14.22	14	378	352	418	125	55	177	M24	
					13.86	16.46	4.92	2.17	6.97		
	368	14.72		14.88	402	475	145	63	193	M24	
400	406,4	16.26	16	428	15.83	18.70	5.71	2.48	7.60	M24	
					402	475	145	63	199		
	419	16.76		16.85	15.83	18.70	5.71	2.48	7.83	M24	
500	508	20.32	20	530	452	526	145	63	218	M24	
					17.80	20.71	5.71	2.48	8.58		
	521	20.84		20.87	452	526	145	63	224,5	M24	
500	508	20.32	20	530	554	627	145	63	269	M24	
					21.81	24.69	5.71	2.48	10.59		
	521	20.84		20.87	554	627	145	63	276	M24	

Alternative materials and surface finishings are available upon request. Contact STAUFF for further information.



Round Steel U-Bolt with Plastic Pipe Saddle (Long) Type RB+RUL



Plastic Pipe Saddle (type RUL)

Diameter Nominal DN	Outside Diameter Pipe / Tube Ø D1		Nominal Bore Pipe (in)	Dimensions (mm/in)						
	(mm)	(in)		Plastic Pipe Saddle (Type RUL)						
				A	L2	L3	B	H5	H6	Ø D4
20	25	.98		30	75	40	30	5	12	11
					2.95	1.57	1.18	.20	.47	.43
	26,9	1.06	3/4	1.18	75	40	30	5	12	11
					2.95	1.57	1.18	.20	.47	.43
25	30	1.18		38	80	48	30	5	12	11
					3.15	1.89	1.18	.20	.47	.43
	33,7	1.33	1	1.50	80	48	30	5	12	11
					3.15	1.89	1.18	.20	.47	.43
32	38	1.50		46	90	56	30	5	12	11
					3.54	2.20	1.18	.20	.47	.43
	42,4	1.69	1-1/4	1.81	90	56	30	5	12	11
					3.54	2.20	1.18	.20	.47	.43
40	44,5	1.76		52	95	62	35	5	15	11
					3.74	2.44	1.38	.20	.59	.43
	48,3	1.90	1-1/2	2.05	95	62	35	5	15	11
					3.74	2.44	1.38	.20	.59	.43
50	57	2.28		64	110	76	35	5	15	14
					4.33	2.99	1.38	.20	.59	.55
	60,3	2.41	2	2.52	110	76	35	5	15	14
					4.33	2.99	1.38	.20	.59	.55
65	76,1	3.04	2-1/2	82	135	94	35	5	15	14
				3.23	5.31	3.70	1.38	.20	.59	.55
80	88,9	3.56	3	94	145	106	40	10	20	14
				3.70	5.71	4.17	1.57	.39	.79	.55
100	108	4.32		120	190	136	40	10	20	18
					7.48	5.35	1.57	.39	.79	.71
	114,3	4.57	4	4.72	190	136	40	10	20	18
					7.48	5.35	1.57	.39	.79	.71
125	133	5.32		148	220	164	40	10	20	18
					8.66	6.46	1.57	.39	.79	.71
	139,7	5.59	5	5.83	220	164	40	10	20	18
					8.66	6.46	1.57	.39	.79	.71
150	159	6.36		176	250	192	50	12	25	18
					9.84	7.56	1.97	.47	.98	.71
	168,3	6.73	6	6.93	250	192	50	12	25	18
					9.84	7.56	1.97	.47	.98	.71
175	193,7	7.75		202	270	218	50	12	25	18
				7.96	10.63	8.58	1.97	.47	.98	.71
200	216	8.64		228	315	248	50	12	25	22
					12.40	9.76	1.97	.47	.98	.87
	219,1	8.76	8	8.98	315	248	50	12	25	22
					12.40	9.76	1.97	.47	.98	.87
250	267	10.68		282	370	302	50	12	25	22
					14.57	11.89	1.97	.47	.98	.87
	273	10.92	10	11.10	370	302	50	12	25	22
					14.57	11.89	1.97	.47	.98	.87
300	318	12.72		332	420	352	60	15	30	22
					16.54	13.86	2.36	.59	1.18	.87
	323,9	12.96	12	13.07	420	352	60	15	30	22
					16.54	13.86	2.36	.59	1.18	.87
350	355,6	14.22	14	378	480	402	60	15	30	26
					18.90	15.83	2.36	.59	1.18	1.02
	368	14.72		14.88	480	402	60	15	30	26
					18.90	15.83	2.36	.59	1.18	1.02
400	406,4	16.26	16	428	540	452	60	15	30	26
					21.26	17.80	2.36	.59	1.18	1.02
	419	16.76		16.85	540	452	60	15	30	26
					21.26	17.80	2.36	.59	1.18	1.02
500	508	20.32	20	530	640	554	60	15	30	26
					25.20	21.81	2.36	.59	1.18	1.02
	521	20.84		20.87	640	554	60	15	30	26
					25.20	21.81	2.36	.59	1.18	1.02

Ordering Codes

Round Steel U-Bolt *RB-*A-52-*W1-*COMPL

One Round Steel U-Bolt (type RB) includes four Nuts (to DIN EN ISO 4032).

* Round Steel U-Bolt	RB
* Dimension A (mm)	A-52
* Material code	Carbon Steel, uncoated Carbon Steel, zinc-plated, blue-chromated
	W1 W32
	Stainless Steel V4A 1.4401 / 1.4571 (AISI 316 / 316 Ti)
	W5

only Plastic Pipe Saddle *RUL-*48.3-*PP

* Plastic Pipe Saddle (Long)	RUL
* Exact outside diameter Ø D1 (mm)	48.3
* Material of Pipe Saddle (see below)	PP

Standard Materials for Plastic Pipe Saddles

Polypropylene
Colour: Green
Material code: **PP**

Polyamide
Colour: Black
Material code: **PA**

See pages 154 / 155 for material properties and technical information.

Alternative materials are available upon request. Please contact STAUFF for further information.

Applications

- Standing or hanging installation of pipes and tubes on beams, profiles and consoles
- Design with two threaded ends allows for ideal adaptation to suit the exact outer diameter of the pipe or tube

Alternative materials and surface finishings are available upon request. Contact STAUFF for further information.



LubeTeam Hydraulic S.r.l.

Administration and Headquarter:

Via Tufara Scautieri, 6

83018 - San Martino Valle Caudina (AV)

Office and Warehouse:

S.S. 7 Appia, Km. 237,00

82011 - Airola BN

ITALY

Tel. +39 0823 950 994

Fax +39 0823 412 546

www.lubeteam.it info@lubeteam.it

Italian VAT / C.F. e P.IVA: 01251720627

Follow us



This document is the property of LubeTeam Hydraulic S.r.l. All data reported here are for the exclusive use of the Receiver. Reproduction is not authorized without writing permission, in all or in part of the content of this document, in accordance to Law 633 art. 171, dated April 22, 1941.

Il presente documento è di proprietà della LubeTeam Hydraulic S.r.l. I dati riportati sono per esclusivo del destinatario. La riproduzione, di tutto o in parte, non è autorizzata senza permesso scritto secondo l'art. 171 della L. 633 del 22 Aprile 1941.